

IMPACT WRENCH

Impact wrench set 1/2" E

- ▶ With 17, 19 and 21 mm sockets in a practical plastic case
- ▶ Composite housing



Technical data

Art no.	2401120
Air requirement Ø approx.	183 l/min
Air requirement max. approx.	439 l/min
Tightening torque max.	950 Nm
Release torque max.	1500 Nm
Weight approx.	2.1 kg

Impact wrench set 1/2"

- ▶ Including ten nuts: 9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm, extension and inline oiler
- ▶ Hammer mechanism
- ▶ Plastic case



Technical data

Art no.	2401110
Air requirement Ø approx.	142.5 l/min
Air requirement max. approx.	420 l/min
Tightening torque max.	1150 Nm
Release torque max.	1650 Nm
Weight approx.	2.1 kg

Industrial impact wrench

IS 3/4" composite

- ▶ With double hammer impact mechanism
- ▶ For tough use in the automotive sector, on assembly lines and in agriculture
- ▶ Impact mechanism housing made of aluminium



Technical data

Art no.	2401260
Air requirement Ø approx.	269 l/min.
Air requirement max. approx.	510 l/min
Tightening torque max.	1800 Nm
Release torque max.	2300 Nm
Weight approx.	3.2 kg

Impact wrench ISS-C 1/2"

- ▶ Housing made of impact-resistant plastic
- ▶ Low-vibration, cold-insulated handle
- ▶ Tightening torque 3-stage adjustable
- ▶ Exhaust air routing via handle, therefore no whirling up of brake dust



Technical data	ISS-C 1/2" Compact PRO	ISS-C 1/2" PRO
Art no.	2401470	2401475
Air requirement Ø approx.	128 l/min	188 l/min
Working pressure max.	6.2 bar	6.2 bar
Tightening torque max.	624 Nm	1112 Nm
Release torque max.	1302 Nm	1756 Nm
Weight approx.	1.2 kg	2 kg

Impact wrench ISS-C 3/4" PRO

- ▶ High-performance double impact mechanism
- ▶ Three-stage torque adjustment for clockwise and anti-clockwise rotation
- ▶ Composite housing made from impact-resistant plastic
- ▶ Low-vibration and cold insulated handle



Technical data

Art no.	2401485
Air requirement Ø approx.	393 l/min
Air requirement max. approx.	6.2 bar
Tightening torque max.	2034 Nm
Release torque max.	2711 Nm
Weight approx.	3.4 kg

Mini industrial impact wrench ISS 1/2"

- ▶ Exhaust air routing via handle, thus no whirling up of brake dust
- ▶ Simple switching between clockwise and left rotation via lever on the rear



Technical data

Art no.	2401371
Air requirement Ø approx.	120 l/min
Air requirement max. approx.	6.3 bar
Tightening torque max.	520 Nm
Release torque max.	570 Nm
Weight approx.	1.3 kg

Angle impact wrench

WSS 1/2" HT PRO

- ▶ For hard-to-reach places
- ▶ High torque thanks to integrated jumbo hammer impact mechanism
- ▶ Adjustable torque on the handle
- ▶ Connection: 1/4"



Technical data

Art no.	2401575
Air requirement Ø approx.	91 l/min
Air requirement max. approx.	6.2 bar
Tightening torque max.	325 Nm
Release torque max.	450 Nm
Weight approx.	1.2 kg



Angle industrial impact wrench

ISS-TTM 1/2"

- Twin Turbo technology
- Optimised working thanks to flat design and 120° swivelling head



Technical data	ISS-TTM 1/2"
Art no.	2401370
Air requirement Ø approx.	115 l/min
Air requirement max. approx.	6.3 bar
Tightening torque max.	500 Nm
Release torque max.	550 Nm
Weight approx.	1.3 kg

Industrial impact wrench

ISS-TT 3/4" Composite



Technical data	1/2" Mini	3/4"
Art no.	2401372	2401376
Air requirement Ø approx.	132 l/min	235 l/min
Working pressure	6.3 bar	6.3 bar
Tightening torque max.	540	1900
Release torque max.	1600 Nm	4100 Nm
Weight approx.	1.3	4.6

Industrial impact wrench

ISS 1" PRO

- For use in the automotive sector on lorries, on buses, for haulage companies, etc.
- With double hammer impact mechanism




Technical data	
Art no.	2401490
Air requirement Ø approx.	411 l/min
Working pressure	6.2 bar
Tightening torque	2441 Nm
Release torque max.	3389 Nm
Weight approx.	6.5 kg

Industrial impact wrench

ISS 1" PRO L

- With double hammer impact mechanism

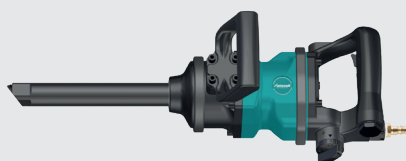

Technical data	
Art no.	2401495
Air requirement Ø approx.	405 l/min
Working pressure	6.2 bar
Tightening torque	2441 Nm
Release torque max.	3389 Nm
Weight approx.	7.5 kg