

wetCAT 118 – Lightweight and compact wet/dry vacuum cleaner

- ▶ Powerful wet/dry filter: Binds the finest dust
- ▶ Ergonomic and practical design
- ▶ Extensive range of accessories included in the scope of delivery
- ▶ Slots for accessories on the device
- ▶ With blower function for cleaning crevices and hard-to-reach gaps



**Starter kit (includes
5x filter bag 7013475,
1x filter cartridge 7013474)**



Model	Starter kit
Art.-No.	7013476

Technical data		wetCAT 118
Art.-No.		7001118
Negative pressure	mbar	160
Air volume	l/min	1750
Tank volume	l	18
Tank material		Plastic
Hose diameter/length	mm/m	32 / 2
Motor cooling		Bypass
Sound pressure level	dB(A)	79
Power cable length	m	8.5
Input power ~50 Hz	kW/V	1.2 / 230
Dimensions (L x W x H) approx.	mm	317 x 330 x 437
Weight approx.	kg	5.8




Scope of delivery:

- › 3x aluminium suction pipe Ø 32 mm length 330 mm each
- › Suction hose 2 m incl. handle with secondary air regulation
- › Floor nozzle wet/dry
- › Flat nozzle incl. brush attachment
- › Cartridge filter
- › Paper filter bag
- › Sponge filter

wetCAT 120 RH / wetCAT 131 IRH – Wet/dry vacuum cleaner with manual filter cleaning

- ▶ Integrated socket for connecting power tools
- ▶ Automatic start-up when switching on a connected power tool
- ▶ Manual filter cleaning for clear filters and consistently high suction power
- ▶ Blower function for cleaning hard-to-reach gaps

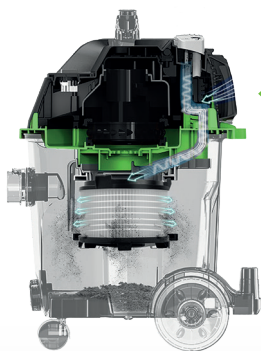

Filter cleaning through the press of a button



wetCAT 120 RH



wetCAT 131 IRH

Technical data		wetCAT 120 RH	wetCAT 131 IRH
Art.-No.		7002110	7002115
Negative pressure	mbar	160	160
Air volume	l/min	1800	1800
Tank volume	l	20	30
Tank material		Plastic	Stainless steel
Hose diameter/length	mm/m	35 / 2	35 / 2
Motor cooling		Bypass	Bypass
Sound pressure level	dB(A)	76	76
Power cable length	m	8.5	8.5
Input power ~50 Hz	kW/V	1.2 / 230	1.2 / 230
Dimensions (L x W x H) approx.	mm	429 x 368 x 645	429 x 368 x 658
Weight approx.	kg	9	9.5

Accessory	Art.-No.
Exhaust air filter E10	7013526

Accessory wetCAT 120 RH	
Environmentally friendly reusable filter bags with locking clip (PU=10 pcs)	7013530
Starter kit (5 pcs. 7013530, 1 pc. 7013526)	7013532

Accessory wetCAT 131 IRH	
Environmentally friendly reusable filter bags with locking clip (PU=10 pcs)	7013531
Starter kit (5 pcs. 7013531, 1 pc. 7013526)	7013533



Scope of delivery:

- › Suction pipe Ø 35 mm / 3 x 0.33 m, aluminium
- › Hose 2 m with connection and handle
- › Flat nozzle
- › Round nozzle with brush
- › Floor nozzle with folding brush
- › Floor nozzle wet/dry
- › Environmentally friendly filter bags
- › Exhaust air filter E10


wetCAT 140 RSA-TOOL M-Class – Wet/dry vacuum cleaner with automatic filter cleaning

- ▶ Automatic filter cleaning for working with reduced downtimes, without interruptions and with high suction power
- ▶ Developed for extracting dust from e.g. hardwoods, stucco, paints, concrete
- ▶ Integrated socket for connecting power tools
- ▶ Integrated automatic switch-on when using electric or pneumatic tools
- ▶ Compact and handy, ideal for work in the trades and on construction sites

- ▶ Elastic and flexible suction hose withstands high loads
- ▶ Compressed air connection for the use of pneumatic tools
- ▶ Remote control included
- ▶ Adjustable air flow regulation for optimum adaptation to different cleaning tasks
- ▶ Including blowing function



see page 2



Scope of delivery:

- › Telescopic suction tube
- › Hose, antistatic Ø 38 / 3 m oil-resistant
- › Pneumatic hose
- › Crevice nozzle
- › Wet/dry floor nozzle
- › Round nozzle
- › 5 filter bags



• Flat main filterclass M



• Practical storage options on the back for cables, hose and suction pipes



• Integrated blowing function that can be used to remove dust, dirt or leaves from hard-to-reach areas



• Integrated remote control for switching on and regulating the vacuum cleaner directly from the hose.



• Extendable telescopic suction tube

Technical data		wetCAT 140 RSA-TOOL M-Class
Art.-No.		7001157
Negative pressure	mbar	220
Air volume	l/min	3600
Tank volume	l	40
Tank material		Plastic
Hose diameter	mm	32/38
Hose length	m	3
Motor cooling		Bypass
Sound pressure level	dB(A)	82
Power cable length	m	5
Input power ~50 Hz	kW/V	1.6 / 230
Dimensions (L x W x H) approx.	mm	640 x 385 x 575
Weight approx.	kg	17

Accessory	Art.-No.
 Filter bag	7013560
 Air filter	7013563
 Pneumatic hose	7013562
 Floor nozzle wet/dry	7013565
 Hose, anti-static, Ø 38mm / 3 m oil-resistant	7013561

Accessory	Art.-No.
 Round nozzle	7013566
 Crevice nozzle	7013564
 Telescopic suction pipe	7013567
 Universal adapter Ø 26/32/35/40/50	7015006
 New Remote control on the handle	7013568

wetCAT 141 RS-TOOL M-Class – Wet/dry vacuum cleaner

Powerful and robust, with automatic filter cleaning

- ▶ Automatic filter cleaning for working with maximum suction power without interruptions
- ▶ Integrated socket with automatic switch-on for power tools
- ▶ Power regulation via rotary knob
- ▶ Flexible suction hose with a length of four metres
- ▶ Compact and robust design for use in the workshop or on construction sites
- ▶ Large chassis with robust swivel castors with parking brake

- ▶ With antistatic suction hose and suction nozzles included in the scope of delivery
- ▶ Can be fitted with tool case (with accessories)

Optional:

- ▶ Connection of pneumatic tools for operating pressures up to 10 bar
- ▶ Remote control kit (art. no: 7014012) enables the vacuum to be switched on directly from the hose

ACCESSORIES:



- Practical holder for tool case/systainer
- So tools are always to hand 1



see page 2



Info & Video



- Flat main filterclass M made of PTFE Teflon
- Easily accessible



- Fleece filter bag with 20 litre capacity



- Practical storage options for cables, hose and suction pipes



- For connecting two suction hoses
- Incl. closure piece
- Simultaneous operation is not permitted for vacuum cleaners approved for hazardous dusts

Scope of delivery:

- › Hose, antistatic Ø 33 mm / 4.0 m with connections
- › 2x suction pipe 500 mm, chrome-plated 0.5 m
- › Floor nozzle dry, antistatic
- › Crevice nozzle, antistatic Ø 36 mm
- › Cap
- › Antistatic universal adapter
- › Flat pleated filter M class
- › Filter bag fleece, 20 l

Technical data		wetCAT 141 RS-TOOL M-Class
Art.-No.		7001155
Negative pressure	mbar	250
Air volume	l/min	4560
Tank volume	l	41
Tank material		Plastic
Hose Ø /length	mm/m	33 / 4
Motor cooling		Bypass
Sound pressure level	dB(A)	74
Power cable length	m	7
Input power ~50 Hz	kW/V	1.1 / 230
Dimensions (L x W x H) approx.	mm	625 x 385 x 545
Weight approx.	kg	21

COMPREHENSIVE ACCESSORIES

Accessory	Art.-No.	Accessory	Art.-No.
Filter bag	7014000	PE disposal bag	7014015
Flat pleated filter	7014001	Practical holder for tool case/systainer	7014013
Hose, antistatic Ø 33 mm 7014002 Ø 29 mm 7014003 Ø 38 mm 7014004		Retrofit kit for pneumatic tools	7014011
Floor nozzle dry, antistatic	7014006	Crevice nozzle, antistatic Ø 36 mm	7014008
Floor nozzle wet	7014010	Universal adapter	7014007
Remote control kit	7014012	Handle	7014016
Driving bar	7014014	Y-double connection	7014017

wetCAT – Wet/dry vacuum cleaner for vacuuming liquids and solid particles for professional use

- ▶ Integrated socket for connecting power tools
- ▶ R models additionally with automatic start-up when a connected power tool is switched on
- ▶ Special seal between head and tank
- ▶ 2-part plug-in suction pipes made of aluminium with plastic coating. Very light and stable
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Locking hose connection on the tank prevents unintentional disconnection of the hose during cleaning
- ▶ Suction motors with noise filter for low-noise operation
- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ Ergonomic head design with cable hook



Float for safe stop when the tank is full of liquid



Nanotech filter "SANI" inhibits bacteria, mould and microparasites

Scope of delivery wetCAT 116 E:

- › Suction hose 2 m
- › Handle with secondary air regulation
- › 2 plug-in suction pipes
- › Floor nozzle with folding brush
- › Upholstery nozzle
- › Round nozzle with brush
- › Flat nozzle
- › Nanotech filter

Scope of delivery wetCAT 137 E, wetCAT 133 IE, wetCAT 137 R, wetCAT 133 IR:

- › Suction hose 4 m
- › Handle with secondary air regulation
- › Plug-in suction pipe
- › Floor nozzle dry
- › Floor nozzle wet
- › Round nozzle with brush
- › Flat nozzle, reduction
- › Nanotech filter



wetCAT 137 E

wetCAT 133 IR
▶ Stainless steel tank

Accessory wetCAT 137 E / 137 R / 133 IE / 133 IR:

	Art.-No.
 Paper filter bags (PU= 5 pcs.)	7010101
 Polycarbonate pre-filter	7010102
 Filter bag - 15 litre capacity (PU=5 pcs.)	7010253
 Sanifilter pre-filter complete kit	7013070
 Replacement filter cloth for Sanifilter	7013071
 Suction hose Ø 29 mm / 5 m with connection for power tool	7013055

Accessory wetCAT 133 IE / 133 IR:

	Art.-No.
 HEPA H14 cartridge filter	7010111

Accessory wetCAT 116 E:

	Art.-No.
 Poly cartridge filter (replacement air filter)	7013009
 Mounting ring and seal for cartridge filter	7010110
 Paper filter bags (PU= 10 pcs.)	7010100
 Filter bag - 3 l (PU=5 pcs.)	7010252
 Sanifilter pre-filter	7013010
 Replacement filter cloth for Sanifilter	7013011
 Floor nozzle with wet, dry and carpet insert	7013012



Unbreakable nylon clip for attaching the head to the tank

Technical data		wetCAT 116 E	wetCAT 137 E	wetCAT 133 IE	wetCAT 137 R	wetCAT 133 IR
Art.-No.		7001120	7001130	7001135	7001140	7001145
Negative pressure	mbar	241	247	247	247	247
Air volume	l/min	3333	3333	3333	3333	3333
Tank volume	l	16	37	33	37	33
Tank material		Plastic	Plastic	Stainless steel	Plastic	Stainless steel
Hose diameter/length	mm/m	36 / 2	38 / 4	38 / 4	38 / 4	38 / 4
Motor cooling		Bypass	Bypass	Bypass	Bypass	Bypass
Sound pressure level	dB (A)	70	72	72	72	72
Power cable length	m	8.5	8.5	8.5	8.5	8.5
Input power~50 Hz	kW/V	1.2 / 230	1 / 230	1 / 230	1 / 230	1 / 230
Dimensions (L x W x H) approx.	mm	400 x 400 x 640	390 x 390 x 900	430 x 430 x 830	390 x 390 x 900	430 x 430 x 830
Weight approx.	kg	10.4	12.3	15	12.3	15

flexCAT 120 IPD – Wet/dry vacuum cleaner for textile cleaning – ideal for home use

- ▶ Carpet and floor cleaning nozzle for carpets and smooth floors
- ▶ Upholstery cleaning nozzle for furniture and car upholstery
- ▶ Detergent tank 4 litres
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Including blowing function and semi-automatic filter cleaning
- ▶ Antistatic connection
- ▶ Holders for nozzles, suction pipe and cable



Scope of delivery:

- › Hose 2 m
- › 2x Suction pipe 450 mm
- › Floor nozzle
- › Crevice nozzle
- › Upholstery nozzle
- › Upholstery cleaning nozzle
- › Carpet or floor cleaning nozzle
- › Paper bag
- › Foam filter
- › Cassette filter F9

Technical data		flexCAT 120 IPD
Art.-No.		7003510
Negative pressure	mbar	180
Air volume	l/min	1700
Tank volume	l	20
Tank material		Stainless steel
Detergent tank volume	l	3.5
Hose diameter/length	mm/m	32 / 2
Motor cooling		Bypass
Sound pressure level	dB(A)	85
Power cable length	m	8.5
Input power ~ 50 Hz	kW/V	1.4 / 230
Dimensions (L x W x H) approx.	mm	410 x 360 x 450
Weight approx.	kg	7.3

flexCAT 116 PD -

Wet/dry vacuum cleaner for textile cleaning with high suction power

- ▶ Carpet and floor cleaning nozzle for carpets and smooth floors
- ▶ Upholstery cleaning nozzle for furniture and car upholstery
- ▶ Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
- ▶ 2-piece plug-in suction pipes (aluminium coated with plastic). Very light and stable
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Nanotech filter "SANI" inhibits bacteria, mould and microparasites
- ▶ Locking hose connection on the tank prevents unintentional disconnection of the hose during cleaning
- ▶ Suction motors with noise filter to ensure low-noise operation
- ▶ Motors equipped with copper windings and motor protection for a long service life



Upholstery cleaning nozzle for furniture and car upholstery

- › Deep fibre cleaning thanks to 2 bar spray pressure and 245 mbar vacuum/suction power

Info & Video



Technical data		flexCAT 116 PD
Art.-No.		7003265
Negative pressure	mbar	245
Air volume	l/min	3583
Tank volume	l	16
Tank material		Plastic
Detergent tank volume	l	3
Hose diameter/length	mm/m	36 / 4
Motor cooling		Bypass
Sound pressure level	dB(A)	73.4
Power cable length	m	8.5
Input power ~50 Hz	kW	1.2 / 230
Dimensions (L x W x H) approx.	mm	390 x 370 x 500
Weight approx.	kg	11



Scope of delivery:

- › Plug-in suction pipe
- › Suction hose 4 m
- › Handle with secondary air regulation
- › Floor nozzle with folding brush
- › Crevice nozzle
- › Upholstery nozzle
- › Round nozzle with brush
- › Upholstery cleaning nozzle
- › Carpet and floor cleaning nozzle
- › Nanotech filter

Accessory	Art.-No.
Paper filter bags (PU= 10 pcs.)	7010100
Filter bag 700 MICRON	7013200

Accessory	Art.-No.
5 filter bags - 3 litre capacity	7010252
Sanifilter pre-filter complete kit	7013010

Accessory	Art.-No.
Replacement filter cloth incl. tensioning strap	7013011
Poly cartridge filter (replacement air filter)	7013009
Floor nozzle with wet, dry and carpet insert	7013012

flexCAT 133 IPD – Wet/dry vacuum cleaner for textile cleaning with large dirt container

- ▶ Floor nozzle with folding brush for dry vacuuming of smooth floors or carpets optionally available
- ▶ Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Optional "SANI" pre-filter inhibits bacteria, mould and microparasites

- ▶ Extremely durable, even for chemicals
- ▶ Suction motor with noise filter to ensure low-noise operation



Detergent tank for easy filling and cleaning



Scope of delivery:

- › Suction hose 4 m Ø 36 mm
- › Upholstery cleaning nozzle
- › Carpet and floor nozzle

Technical data		flexCAT 133 IPD
Art.-No.		7003267
Negative pressure	mbar	242
Air volume	l/min	3500
Tank volume	l	33
Tank material		Stainless steel
Detergent tank	l	11
Hose diameter/length	mm/m	36 / 4
Motor cooling		Bypass
Sound pressure level	dB(A)	72
Power cable length	m	8.5
Input power ~50 Hz	kW/V	1 / 230
Dimensions (L x W x H) approx.	mm	380 x 380 x 650
Weight approx.	kg	13

Accessory	Art.-No.
Sanifilter pre-filter complete kit	7013403

flexCAT 262-2 IEPD Wet/dry vacuum cleaner - Special vacuum cleaner for carpet, upholstery and car cleaning

- ▶ Connection of a second motor possible! A second motor can be switched on for high suction power if required. This enables customised energy-saving operation depending on the application.
- ▶ Floor nozzle with folding brush for dry vacuuming of smooth floors or carpets

- ▶ Large detergent tank with 25 litre capacity
- ▶ Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
- ▶ Nanotech filter "SANI" inhibits bacteria, mould and microparasites

- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ Float for safe stop when the tank is full of liquid

- › With powerful detergent pump (90 W)
- › Sturdy chassis with handle



Scope of delivery:

- › Suction hose 4 m
- › Upholstery cleaning nozzle

Technical data		flexCAT 262-2 IEPD
Art.-No.		7003271
Negative pressure	mbar	242
Air volume	l/min	7000
Tank volume	l	62
Tank material		Stainless steel
Detergent tank volume	l	25
Hose diameter/length	mm/m	40 / 4
Number of motors		2
Motor cooling		Bypass
Sound pressure level	dB(A)	72.0
Power cable length	m	8.5
Input power ~50 Hz	kW/V	2 / 230
Dimensions (L x W x H) approx.	mm	730 x 580 x 970
Weight approx.	kg	33

Accessory	Art.-No.
filter bags - 3 litre capacity (PU= 5 pcs.)	7010254
Sanifilter pre-filter complete kit	7013080
Dry suction set	7010324
Carpet brush	7010000
Carpet cleaning brush 260 mm	7010323

wetCAT 262 IET/ wetCAT 362 IET – Wet/dry vacuum cleaner with large, robust chassis

- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ Special seal between head and tank
- ▶ 2-part plug-in suction pipes made of aluminium with plastic coating. Very light and stable
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Integrated socket for connecting power tools
- ▶ 2- and 3-motor models with separate on/off switches. The operator can choose how many motors are to be operated. This enables significant energy savings



wetCAT 262 IET
Fig. shows accessories
"Fixed floor nozzle"
(Art.-No. 7013082)

Technical data		wetCAT 262 IET	wetCAT 362 IET
Art.-No.		7001270	7001370
Negative pressure	mbar	247	247
Air volume	l/min	6666	10000
Tank volume	l	62	62
Tank material		Stainless steel	Stainless steel
Hose diameter/length	mm/m	38 / 4	38 / 4
Number of motors		2	3
Motor cooling		Bypass	Bypass
Sound pressure level	dB(A)	74.5	76
Power cable length	m	8.5	8.5
Input power ~50 Hz	kW	2 / 230	2.9 / 230
Dimensions (L x W x H) approx.	mm	570 x 700 x 1140	570 x 700 x 1140
Weight approx.	kg	22	22



Scope of delivery:

- › Suction hose 4 m
- › Handle with secondary air regulation
- › Plug-in suction pipe
- › Floor nozzle dry
- › Floor nozzle wet
- › Round nozzle with brush
- › Flat nozzle
- › reduction
- › Poly cartridge filter

Accessory	Art.-No.
Paper cartridge filter (dry)	7010107
Washable poly-cartridge filter (wet)	7010108
Polycarbonate pre-filter	7010106
HEPA cartridge filter (wet)	7010109

Accessory	Art.-No.
Paper filter bags (PU= 10 pcs.)	7010105
Sanifilter pre-filter complete kit	7013080
Filter bag - 30 litre capacity (PU=5)	7010254
Pre-filter small	7010103
Pre-filter large	7010106

Accessory	Art.-No.
Replacement filter cloth for the Sanitech filter	7013081
Suction hose Ø 29 mm / 5 m with connection for power tool	7013055
Floor nozzle permanently mounted	7013082
Hose and nozzle set Ø 36 mm / 4 m	7013623

wetCAT 290 E – Wet/dry vacuum cleaner For suction of liquids and solid particles

- ▶ Special seal between head and tank resistant to oil and chemical residues without losing flexibility
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Locking hose connection on the tank prevents unintentional disconnection of the hose during cleaning
- ▶ Two separately switchable motors for energy-efficient operation



- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ Ergonomic head design with cable hook
- ▶ Easy to maneuver on all surfaces thanks to the robust trolley with large wheels
- ▶ Drain hose on the back for easy emptying of the tank

Model		wetCAT 290 E
Art.-No.		7001375
Negative pressure	mbar	280
Air volume	l/min	9300
Filter surface	cm ²	4090
Tank volume	l	90
Tank material		Plastic
Hose diameter/length	mm	38 / 5
Sound pressure level	dB(A)	74
Cable length	m	8.5
Number of motors		2
Input power ~50 Hz	kW/V	2.6 / 230
Dimensions (L x W x H) approx.	mm	560 x 460 x 920
Weight approx.	kg	26



Scope of delivery:

- › 2-piece plug-in suction pipe
- › Telescopic suction pipe
- › Hose Ø 38 mm 5 m
- › Floor nozzle dry
- › Floor nozzle wet
- › Flat nozzle
- › Round nozzle with brush
- › reduction
- › Nanotech filter
- › Nylon filter

flexCAT 350 IH-PRO – Wet/dry vacuum cleaner with manual filter cleaning



- Motors with copper windings and motor protection
- Star-shaped pocket filters with a larger filter area than cylindrical filters
- Convenient emptying of the tank without removing the suction head thanks to the detachable tank
- Special seal between head and tank
- Float closes turbines when the tank is full, preventing damage
- Easy to maneuver on all surfaces thanks to the robust trolley with large wheels



Manual filter cleaning guarantees consistently high suction power



Convenient emptying of the tank without removing the suction head thanks to the detachable tank



High suction power thanks to three motors with separate on/off switches



HEPA H14 cartridge filter with a separation efficiency of 99.997%



Scope of delivery:

- Pocket filter
- Polycarbonate pre-filter
- HEPA H14 cartridge filter
- Filter bag
- Funnel
- Float
- Without hoses
- Without nozzles



Technical data		flexCAT 350 IH-PRO
Art.-No.		7003600
Negative pressure	mbar	245
Air volume	l/min	10749
Tank volume	l	50
Tank material		Stainless steel
Hose diameter	mm	50
Motor cooling		Bypass
Sound pressure level	dB(A)	76
Number of motors		3
Input power ~50 Hz	kW/V	2.9 / 230
Dimensions (L x W x H)	mm	580 x 700 x 1150
Weight approx.	kg	40

CHOOSE YOUR HOSE AND NOZZLE SET!

Art.-No.

	SET 1: Hose and nozzle set Ø 38 mm / 3 m Consisting of: antistatic PU hose Ø 38 mm/3 m, including adapter 50 mm / 38 mm, 2 x plastic suction pipe Ø 38 mm / 0.5 m, chrome-plated suction pipe Ø 34 mm / 2 x 0.58 m, Flat nozzle Ø 38 mm, round nozzle with brush Ø 38 mm, metal floor nozzle with brush strip	7013606
	SET 2: Hose and nozzle set Ø 50 mm / 4 m Consisting of: ; antistatic PU hose Ø 50 mm / 4 m; aluminium suction pipe Ø 50 / 1400 mm; antistatic rubber flat nozzle Ø 50 mm; Floor nozzle with brush strips Ø 50 mm Two suction lips	7013608
	SET 3: Oil-resistant hose and nozzle set Ø 38 mm / 4 m Comprises: Hose, oil-resistant Ø 40 mm / 4 m, including adapter 50 mm / 38 mm, chrome-plated flat nozzle, chrome-plated suction pipe Ø 34 mm / 2 x 0.58 m, metal floor nozzle with brush strip	7013611
	SET 6: Antistatic hose & nozzle set Ø 38 mm / 4.5 m Consisting of: antistatic hose Ø 38 - 60 mm / 4.5 m; adapter 50mm / 38mm; chrome-plated suction tubes; dry floor nozzle; chrome-plated flat nozzle	7013613
	SET 7: Antistatic hose & nozzle Ø 50 mm / 5 m Comprises: Hose, antistatic Ø 50 mm / 5 m; suction pipe Ø 50 mm / 1,400 mm, aluminium; rubber flat nozzle, antistatic Ø 50 mm; floor nozzle with brush strips Ø 50 mm	7013610

Accessory	Art.-No.
	L-class pocket filter 7013600
	Polycarbonate pre-filter 7013601
	HEPA H14 cartridge filter 7013602
	M class filter bag 7010334

flexCAT 141 EP, flexCAT 290 EPT, flexCAT/, flexCAT 2107 EPT – Special vacuum cleaner with integrated water pump



- Suitable for flooding**
Thanks to the integrated water pump, ideal for absorbing and pumping out liquids (e.g. water in the cellar)
- ▶ Motors equipped with copper windings and motor protection for a long service life
 - ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting Hose connection on the container with lock prevents unintentional loosening of the hose during cleaning
 - ▶ Float prevents water from entering the motor
 - ▶ Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
 - ▶ 2-part plug-in suction pipes made of aluminium with plastic coating. Very light and stable

flexCAT 2107 EPT:

- ▶ If required, a second motor can be switched on to increase the suction power. This allows the energy consumption to be optimally adapted to the respective application.



flexCAT 141 EP: Integrated water pump



flexCAT 141 EP

flexCAT 2107 EPT



Scope of delivery flexCAT 290 EPT/ flexCAT 2107 EPT:

- › 2 suction pipes Ø 38 / 500 mm pluggable
- › Hose Ø 38 mm / 4.0 m with connections
- › Handle with secondary air regulation
- › Floor nozzle wet



Scope of delivery flexCAT 141 EP:

- › Suction pipe Ø 38 mm aluminium/ plastic Length 0.5 m
- › 5 m suction hose Ø 38 mm with connections
- › Handle with secondary air regulation
- › Floor nozzle wet
- › Flat nozzle Ø 38 mm
- › Round brush
- › Adapter
- › With Geka connection

Technical data		flexCAT 141 EP	flexCAT 290 EPT	flexCAT 2107 EPT
Art.-No.		7003285	7003290	7003295
Negative pressure	mbar	242	247	242
Air volume	l/min	3475	7000	7000
Tank volume	l	41	90	107
Tank material		Stainless steel	Polyethylene	Polyethylene
Water pump performance	l/min	180	180	400
Pump pressure max.	bar	0.7	0.85	1.45
Hose diameter/length	mm/m	38 / 5	38 / 4	38 / 4
Number of motors		1	2	2
Motor cooling		Bypass	Bypass	Bypass
Sound pressure level	dB(A)	72.8	74.5	74
Power cable length	m	8.5	8.5	8.5
Input power ~50 Hz	kW/V	1 / 230	2 / 230	2.4 / 230
Dimensions (L x W x H) approx.	mm	380 x 380 x 900	570 x 700 x 1140	500 x 620 x 1013
Weight approx.	kg	15	33	35

Accessory	Art.-No.
Rubber lip insert for wet floor nozzle	7013053
Suction pipe retaining clamp for vacuum cleaner with trolley	7010001
Geka-Storz adapter 52C	7013411
Pressure hose 52 mm x 15 m, with C Storz coupling	7510003

flexCAT 290 EPF special vacuum cleaner – for the requirements of fire brigades

New



- ▶ Designed for use by the fire brigade or THW.
- ▶ For pumping out water, e.g. after flooding or pipe damage
- ▶ Personal circuit breaker that protects against electrical faults in the water
- ▶ Float switch for triggering and stopping the pump
- ▶ Additional drain hose for easy emptying
- ▶ The stainless steel submersible pump is characterised by its corrosion resistance and durability
- ▶ The robust design includes a plastic container with metal quick-release fasteners, ideal for intensive use
- ▶ Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
- ▶ Two motors can be separately power requirement individually switchable

Technical data		flexCAT 290 EPF
Art.-No.		7003299
Negative pressure	mbar	251
Air volume	l/min	8400
Tank volume	l	90
Tank material		Plastic
Hose diameter	mm	38
Number of motors		2
Water pump performance	l/min	240
Sound pressure level	dB(A)	77
Power cable length	m	8.5
Input power ~ 50 Hz	kW/V	2 / 230
Dimensions (L x W x H) approx.	mm	450 x 520 x 920
Weight approx.	kg	37

Scope of delivery:

- › Suction pipe, 50 cm, Ø 38 mm
- › 5 m suction hose Ø 38 mm
- › Floor nozzle wet



Connection of the fire hoses via C-coupling (Storz coupling, non-return valve is in the tank)



Dirt trap separates solids from liquids, protects the pump and facilitates disposal. It effectively protects against blockages caused by stones, leaves or wood that have been sucked in

flexCAT 290 EP – Wet/dry vacuum cleaner with integrated water pump for connection to core drills

New



- ▶ For effective extraction of drilling water and sludge when working with stone and concrete
- ▶ The stainless steel submersible pump is characterised by its corrosion resistance and durability
- ▶ The robust design includes a plastic container with metal quick-release fasteners, ideal for intensive construction site use
- ▶ The integrated separating plate in the container separates solids from liquids, protects the pump and facilitates disposal
- ▶ The adjustable water supply via valve enables precise control of the flow rate

- ▶ Innovative seal and strong closures
- ▶ Special seal between head and tank is resistant to oil and chemical residues without losing flexibility

Technical data		flexCAT 290 EP
Art.-No.		7003297
Negative pressure	mbar	251
Air volume	l/min	8400
Tank volume	l	90
Tank material		Plastic
Hose diameter	mm	38
Number of motors		2
Water pump performance	l/min	220
Sound pressure level	dB(A)	77
Power cable length	m	8.5
Input power ~ 50 Hz	kW/V	2 / 230
Dimensions (L x W x H) approx.	mm	450 x 520 x 950
Weight approx.	kg	33.1



Scope of delivery:

- › Aluminium/plastic suction pipes 50 cm Ø 38 mm each
- › 5 m suction hose with Ø 38 mm connections
- › Handle with secondary air regulation
- › Floor nozzle wet
- › Nylon filter 700 micron

Accessory Art.-No.

	Nylon filter	7013725
	Drain hose 5 m	7013726
	Hose clamp	7013727

flexCAT 135 O – Wetspecial vacuum cleaner with oil strainer



- For vacuuming liquids and solid particles, e.g. cooling lubricants, highly oily liquids and chips
- A separation tank with integrated oil strainer is located between the tank and the head
- Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
- Float prevents water from entering the motor
- Drain valve for quick and easy emptying of the tank
- Elastic and flexible suction hose withstands high loads and any kind of twisting
- Motors equipped with copper windings and motor protection
- Ergonomic head design with cable hook



Technical data		flexCAT 135 O
Art.-No.		7003395
Negative pressure	mbar	245
Air volume	l/min	3583
Tank volume	l	35
Tank material		Plastic
Hose diameter/length	mm/m	38 / 3
Number of motors		1
Motor cooling		Bypass
Sound pressure level	dB(A)	72
Power cable length	m	8.5
Input power ~50 Hz	kW/V	1 / 230
Dimensions (L x W x H) approx.	mm	380 x 380 x 660
Weight approx.	kg	10.6



Accessory	Art.-No.
Polyester cartridge filter	7010112




Scope of delivery:

- Suction pipe Ø 34 mm / 2 x 0.58 m, chrome-plated
- PU hose, antistatic Ø 38 mm / 3 m
- Floor nozzle with brush strip Ø 38mm, metal
- Flat nozzle, chrome-plated
- Metal protective cage
- Poly cartridge filter
- Mounting ring and seal for cartridge filter

flexCAT 390 EOT – Special wet/dry vacuum cleaner with oil strainer and large 90 litre container



- Version for suctioning liquids, chips and other solid particles, e.g. for suctioning cooling lubricants, highly oily liquids and fine metal chips
- A separation tank with integrated oil strainer is located between the tank and the head
- Motors equipped with copper windings and motor protection for a long service life
- Special seal between head and tank
- Float prevents water from entering the motor
- Three motors with separate on/off switches. The operator can choose how many motors are to be operated. This enables significant energy savings
- Ball valve for draining the liquids



Technical data		flexCAT 390 EOT
Art.-No.		7003390
Negative pressure	mbar	250
Air volume	l/min	10750
Tank volume	l	90
Tank material		Polyethylene
Hose diameter/length	mm/m	38 / 3
Number of motors		3
Motor cooling		Bypass
Sound pressure level	dB(A)	76
Power cable length	m	8.5
Input power ~50 Hz	kW/V	3.3 / 230
Dimensions (L x W x H) approx.	mm	570 x 700 x 1140
Weight approx.	kg	38.8

Accessory	Art.-No.
Polyester cartridge filter	7010108
More oil resistant Special suction hose	7010311



Scope of delivery:

- Plug-in chrome-plated steel intake manifolds
- Oil-resistant special suction hose 3 m
- Floor nozzle wet
- Chrome-plated flat steel nozzle
- Float housing with mesh filter
- Oil strainer with fastening cap

flexCAT 378 EOT-PRO – Wet/dry special vacuum cleaner for industry with special sieve insert for extracting cooling lubricants, highly oily liquids and large quantities of coarse metal swarf

- For vacuuming liquids, chips and other solid particles, e.g. cooling lubricants, highly oily liquids and **coarse metal chips**
- Removable strainer insert for separate disposal of metal chips
- Ball valve for draining the liquids
- Special seal between head and tank
- Oil-resistant suction hose withstands high loads and any type of twisting

- Stainless steel tank is insensitive to sharp-edged metal chips
- Metal hose connection on the tank with locking mechanism prevents unintentional disconnection of the hose during cleaning
- Float for safe stop when the tank is full of liquid
- Suction motors with noise filter to ensure low-noise operation

- Three motors with separate on/off switches. The operator can choose how many motors are to be operated. This enables significant energy savings
- Motors equipped with copper windings and motor protection



- For daily machine cleaning in metalworking and processing
- Side hose connection for improved suction power
- Solid steel chassis with tilting device for easy emptying



With appliance socket and automatic switch-on



Protective insert with integrated float prevents liquid from entering the filters or suction motors during wet vacuuming



Stainless steel tank is insensitive to sharp-edged metal chips

Technical data		flexCAT 378 EOT-PRO
Art.-No.		7003380
Negative pressure	mbar	245
Air volume	l/min	10750
Tank volume	l	78
Tank material		Stainless steel
Hose diameter/length	mm/m	38 / 4
Number of motors		3
Motor cooling		Bypass
Sound pressure level	dB(A)	76
Power cable length	m	8.5
Input power ~50 Hz	kW/V	3.3 / 230
Dimensions (L x W x H) approx.	mm	635 x 580 x 1030
Weight approx.	kg	34

Accessory	Art.-No.
Replacement filter	7010316



Scope of delivery:

- Plug-in chrome-plated steel intake manifolds
- Oil-resistant special suction hose 3 m
- Metal floor nozzle with interchangeable inserts
- Chrome-plated flat steel nozzle

flexCAT 250 EOT-PRO – Wet/dry industrial vacuum cleaner for extracting oily liquids and metal swarf with innovative flow-mix system

- ▶ High suction power thanks to two motors with separate on/off switch
- ▶ Motors with copper windings and motor protection
- ▶ Oil-resistant suction hose withstands high loads and any type of twisting
- ▶ Hose connection positioned on the side for increased suction power
- ▶ Metal hose connection on the tank with locking mechanism prevents unintentional disconnection of the hose during cleaning
- ▶ Level indicator for liquids on the outside of the tank
- ▶ Removable strainer insert for separate disposal of metal chips
- ▶ Special seal between head and tank
- ▶ Easy draining of liquids via ball valve
- ▶ Easy to maneuver on all surfaces thanks to the robust trolley with large wheels



Technical data		flexCAT 250 EOT-PRO
Art.-No.		7003381
Negative pressure	mbar	363/251
Air volume	l/min	5400
Tank volume	l	50
Tank material		Stainless steel
Hose diameter	mm	50
Number of motors		2
Motor cooling		Bypass
Sound pressure level	dB(A)	72
Power cable length	m	8.5
Input power ~50 Hz	kW/V	2 / 230
Dimensions (L x W x H) approx.	mm	580 x 700 x 1150
Weight approx.	kg	40



Innovative, patented Flow-Mix system for higher suction power:

- ▶ A slider can be used to select a higher air volume with a constant negative pressure or a higher negative pressure with a slightly increased air volume.
- ▶ Setting with higher air volume: For light materials such as dust, sand, plastic shavings or for vacuuming damp floors
- ▶ Setting with higher negative pressure: For heavy materials such as gravel, metal shavings, thick liquids or for use with suction hoses over 8 m long



Patented Flow-Mix system: A slider can be used to select a higher air volume with a constant negative pressure or a higher negative pressure with a slightly increased air volume



Convenient emptying of the tank without removing the vacuum cleaner head thanks to the detachable tank.



Protective insert with integrated float prevents liquid from entering the filters or suction motors during wet vacuuming

CHOOSE YOUR HOSE AND NOZZLE SET!

	Art.-No.
SET 1: Hose and nozzle set Ø 38 mm / 3 m Consisting of: antistatic PU hose Ø 38 mm / 3 m, including adapter 50 mm / 38 mm, 2 x plastic suction pipe Ø 38 mm / 0.5 m, chrome-plated suction pipe Ø 34 mm / 2 x 0.58 m, Flat nozzle Ø 38 mm, round nozzle with brush Ø 38 mm, metal floor nozzle with brush strip	7013606
SET 2: Hose and nozzle set Ø 50 mm / 4 m Consisting of: antistatic PU hose Ø 50 mm / 4 m; aluminium suction pipe Ø 50 / 1400 mm; antistatic rubber flat nozzle Ø 50 mm; Floor nozzle with brush strips Ø 50 mm Two suction lips	7013608
SET 3: Oil-resistant hose and nozzle set Ø 38 mm / 4 m Comprises: Hose, oil-resistant Ø 40 mm / 4 m, including adapter 50 mm / 38 mm, chrome-plated flat nozzle, chrome-plated suction pipe Ø 34 mm / 2 x 0.58 m, metal floor nozzle with brush strip	7013611
SET 4: Oil-resistant hose and nozzle set Ø 60 mm / 3 m Comprises: Hose, oil-resistant Ø 60 mm / 5 m, including adapter 50mm / 60mm" Aluminium suction pipe Ø 50 / 1400 mm, floor nozzle, brush strip, rubber surface nozzle	7013621

Accessory	Art.-No.
Replacement filter	7010316



Scope of delivery:

- › Replacement filter
- › Protective insert
- › Metal strainer basket
- › Metal protective cage
- › Mounting ring
- › Without hoses
- › Without nozzles

flexCAT PRO

Wet/dry special vacuum cleaner for oily liquids and metal swarf

- Problem-free suction, e.g. of cooling lubricants or coarse metal chips
- Ball valve for draining the liquids
- Metallic hose connection on the container with locking mechanism prevents accidental loosening.
- With fill level indicator
- Monitoring through transparent tube on the side
- With filter monitoring, appliance socket and automatic switch-on function
- Float for safe stop when the tank is full of liquid
- Special seal between head and tank is resistant to oil and chemical residues without losing flexibility
- Easy disposal of metal chips thanks to integrated sieve basket
- **flexCAT 3100 EOT-PRO**
- Powder-coated steel frame as additional impact protection
- Trolley with non-marking fixed castors at the rear and swivel castors with parking brake at the front
- Three motors can be switched on separately
- Device is supplied with **230V CEE** plug



Save costs and protect the environment - by recycling oil!



flexCAT 3100 EOT-PRO



flexCAT 290 OP-PRO



Scope of delivery:

- Filter kit
- Nylon filter
- Strainer for the tank

Technical data		flexCAT 3100 EOT-PRO	flexCAT 290 OP-PRO
Art.-No.		7003382	7003383
Negative pressure	mbar	245	280
Air volume	l/min	3 x 3583	9300
Container volume / material	l	100 / Stainless steel	90 / Stainless steel
Hose diameter	mm	50	60
Number of motors		3	2
Motor cooling		Bypass	Bypass
Connected load max. appliance socket	W	1000	400
Sound pressure level	dB(A)	76	74
Input power ~50 Hz	kW/V	3.3 / 230	2.2 / 230
Dimensions (L x W x H) approx.	mm	850 x 650 x 1350	640 x 600 x 1280
Weight approx.	kg	65	47

flexCAT 290 OP-PRO

- Easy to maneuver on all surfaces thanks to the large wheels
- Nylon filter for separation up to 500 micrometres
- The **DFS double filter system** simultaneously **absorbs liquids and solids** - without the operator having to change the equipment.
- **Oil-resistant stainless steel pump**

Don't forget to order your hose and nozzle set!
(not included in the scope of delivery)

CHOOSE YOUR ACCESSORIES!

Accessory flexCAT 3100 EOT- PRO	Art.-No.
Hose and nozzle set oil-resistant Ø60mm	7013621
3m oil-resistant suction hose Ø50mm	7013435
Floor nozzle	7013436
Rubber lip insert for floor nozzle	7013437
Rubber surface nozzle	7013438
Adapter cable 230V Schuko - CEE coupling 16A, 1.5m	7013800
Adapter cable 400V CEE plug - CEE coupling 16A, 1.5m	7013805

Accessory flexCAT 3100 EOT- PRO	Art.-No.
Adapter cable 230V Schuko - CEE coupling 16A, 1.5m	7013800
Adapter cable 400V CEE plug - CEE coupling 16A, 1.5m	7013805

Accessory flexCAT 3100 EOT- PRO	Art.-No.
Oil-resistant hose and nozzle set Ø 38 mm / 4 m	7013611

Comprises:

Hose, oil-resistant Ø 40 mm / 4 m incl. adapter 50 mm / 38 mm, suction pipe Ø 34 mm / 2 x 0.58 m, chrome-plated, brush metal version

Oil-resistant hose and nozzle set Ø 60 mm	7013621
---	---------

Comprises:

Hose, oil-resistant Ø 60 mm / 3 m, suction pipe Ø 50 / 1400 mm, aluminium, floor nozzle, brush strip, surface nozzle Ø 50 mm rubber

Hose and nozzle set Ø 50 mm / 4 m	7013608
-----------------------------------	---------

Comprises:

Suction pipe Ø 50 / 1400 mm, aluminium, flat nozzle, antistatic Ø 50 mm rubber, floor nozzle with brush strips Ø 50 mm, two suction lips

Hose and nozzle set Ø 38 mm / 3 m	7013606
-----------------------------------	---------

Comprises:

PU hose, antistatic Ø 38 mm / 3 m incl. adapter 50 mm / 38 mm, 2 x suction pipe Ø 38 mm / 0.5 m, plastic, suction pipe Ø 34 mm / 2 x 0.58 m, chrome-plated, flat nozzle Ø 38 mm, round nozzle with brush Ø 38 mm

flexCAT 130 ATEX

Dryspectral vacuum cleaner for working in areas with a risk of dust explosion

- ▶ Vacuuming food, pharmaceuticals or animal feed
- ▶ Vacuuming dirt from dust group IIIC: soot, coal, coke dust, flour, starch, grain, chemical dust, etc.
- ▶ All components protected from damage caused by electrostatic discharge
- ▶ Multi-stage filtration
- ▶ Explosion protection devices in accordance with Directive 2014/34/EU, explosion-proof turbine for use in ATEX Zone 22
- ▶ Filter protected from overpressure by alarm system
- ▶ Main filter and filter bag antistatic

- ▶ Motor equipped with Klixon thermal protection
- ▶ Suction motor with noise filter for low-noise operation
- ▶ Delivered without power plug - Power connection by a qualified electrician

- ▶ Vacuuming up dust group IIIC dirt
- ▶ Turbine explosion-proof for use in ATEX Zone 22



flexCAT 130 ATEX with antistatic wheels and brakes



see page 2



see page 2

Technical data		flexCAT 130 ATEX
Art.-No.		7003400
Negative pressure	mbar	242
Air volume	l/min	2100
Tank volume	l	38
Tank material		Stainless steel
Hose diameter	mm	38 / 32
Motor cooling		Bypass
Sound pressure level	dB(A)	72
Power cable length	m	10
Input power ~50 Hz	kW/V	1.2 / 230
Dimensions (L x W x H) approx.	mm	500 x 500 x 980
Weight approx.	kg	24

Scope of delivery:

- ▶ Main filter antistatic
- ▶ HEPA14 filter supply air
- ▶ HEPA filter cover
- ▶ HEPA14 filter exhaust air
- ▶ DRALON filter bag antistatic
- ▶ POLYLINER filter bag antistatic

Accessory	Art.-No.
Cartridge filter, HEPA H14, supply air	7013371
Cartridge filter, HEPA H14	7013373
Filter bag, DRALON, antistatic	7013374

Don't forget to order your hose and nozzle set!



Hose and nozzle set Ø 38/32 mm:

- ▶ 2 chrome-plated suction pipes Ø 38 mm
- ▶ Antistatic hose Ø 38 mm
- ▶ Floor nozzle with antistatic nylon brush Ø 38 mm
- ▶ Reducer Ø 38- 32 mm
- ▶ Flat nozzle antistatic Ø 32 mm
- ▶ Round brush antistatic Ø 32 mm
- ▶ Floor nozzle small, antistatic Ø 32 mm



Hose and nozzle set
Art.-No. 7013380

Hose and nozzle set not included in the scope of delivery!

flexCAT 1100 ATEX

Explosion-proof high-performance industrial vacuum cleaner

- ▶ Large filter surface for long service life
- ▶ Manual and efficient filter cleaning
- ▶ A vacuum pressure gauge allows continuous monitoring of proper operation and indicates filter occupancy
- ▶ Explosion protection devices according to Directive 2014/34/EU
- ▶ Explosion-proof turbine for use in ATEX Zone 22

- ▶ Maintenance-free direct drive
- ▶ Suction motors with noise filter to ensure low-noise operation
- ▶ Ergonomic lever emptying of the mobile and removable collection tank

- ▶ Powder-coated steel frame as additional impact protection
- ▶ Equipped with track-free swivel castors and front parking brakes



see page 2

Cast aluminium suction connection
Ø 50 mm with quick-release fastener



Technical data		flexCAT 1100 ATEX
Art.-No.		7003410
Negative pressure	mbar	245
Air volume	l/min	5067
Tank volume	l	100
Filter surface	cm²	19500
Tank material		Steel
Sound pressure level	dB(A)	76
Power cable length	m	8.5
Input power ~50 Hz	kW/V	3 / 400
Dimensions (L x W x H) approx.	mm	660 x 900 x 1730
Weight approx.	kg	85

Don't forget to order your hose and nozzle set!



Antistatic hose and nozzle set:

- ▶ Suction pipe Ø 50 / 1,400 mm made of aluminium
- ▶ Hose, antistatic Ø 50 mm / 3 m with connections
- ▶ Floor nozzle
- ▶ 2 brush strips for floor nozzle
- ▶ Crevice nozzle Ø 50 mm



Hose and nozzle set
Art.-No. 7013427

Hose and nozzle set not included in the scope of delivery!



Scope of delivery:

- ▶ Filter kit
- ▶ Polycarbonate pre-filter

Special vacuum cleaner flexCAT 120 VCA – Ash vacuum cleaner

- Reliably and effortlessly sucks up ash, sand and coarse dirt
- Suction unit can be easily removed to empty the tank after opening the clip fasteners
- High suction power
- With washable E10 filter
- Practical storage of the supplied nozzles directly on the appliance
- Blower function for heating embers or blowing off surfaces



Technical data		flexCAT 120 VCA
Art.-No.		7003130
Negative pressure	mbar	150
Air volume	l/min	1500
Tank volume	l	20
Hose diameter/length	mm/m	38 / 1.5
Sound pressure level	dB(A)	76
Power cable length	m	3.5
Input power ~50 Hz	kW/V	1.2 / 230
Dimensions (L x W x H) approx.	mm	310 x 310 x 420
Weight approx.	kg	4.4

Scope of delivery:

flexCAT 120 VCA:

- Suction Hose 1 m with connections
- Connecting tube
- Crevice nozzle
- Cartridge filter E10
- Metal protective grille

Accessory flexCAT 120 VCA	Art.-No.
Replacement filter	7013186
Replacement filter bag	7013187

flexCAT VCA – Dry-Special vacuum cleaner for industrial use with hot materials

- Particularly suitable for hotels, restaurants, cafés or bakeries
- Reliably and effortlessly sucks up ash, sand and coarse dirt, even with intensive use
- Innovative seal and strong closures

- High suction power thanks to powerful, two-stage suction motor
- Large stainless steel dirt tank with its own carrying handles
- With washable HEPA cartridge filter

flexCAT 262 VCA

- Two motors with separate on/off switches. The operator can choose how many motors are to be operated. This enables significant energy savings
- Solid chassis with ergonomic driving handle



Technical data		flexCAT 141 VCA	flexCAT 262 VCA
Art.-No.		7003160	7003165
Negative pressure	mbar	274	274
Air volume	l/min	3500	7000
Tank volume	l	41	62
Hose diameter	mm/m	38	38
Filter surface	cm ²	2300	3627
Number of motors		1	2
Motor cooling		Bypass	Bypass
Sound pressure level	dB(A)	72	74
Power cable length	m	8.5	8.5
Input power ~50 Hz	kW/V	1.3 / 230	2.4 / 230
Dimensions (L x W x H) approx.	mm	395 x 385 x 900	550 x 600 x 930
Weight approx.	kg	12	24

CHOOSE YOUR HOSE AND NOZZLE SET!

Art.-No.

-  **SET 1:** Hose and nozzle set Ø 38 mm heat-resistant up to 200 °C
Comprises: Metal hose Ø 38 mm / 2.8 m, flexible, suction pipe extension Ø 38 / 1500 mm with heat protection, suction pipe Ø 38 / 1000 mm, oven cleaning nozzle with heat-resistant rubber wiper

7013325

-  **SET 2:** Hose and nozzle set Ø 38 mm heat-resistant up to 120 °C
Comprises: EPDM hose Ø 38 mm / 3 m, suction pipe Ø 38 / 1000 mm, oven cleaning nozzle with heat-resistant rubber wiper

7013326



flexCAT 141 VCA

flexCAT 262 VCA

Don't forget to order your hose and nozzle set! (not included in the scope of delivery)

Scope of delivery:

- High temperature resistant filter
- HEPA cartridge filter

dryCAT 15 – Handy and lightweight dry vacuum cleaner with practical shoulder strap

- ▶ Washable and reusable cartridge filter F9
- ▶ Manual filter cleaning ensures consistent suction power
- ▶ Suction hose extendable from 0.5 to 1.6 metres



Scope of delivery:

- › Suction hose 0.5 m Ø 32 mm
- › Round nozzle with brush
- › Crevice nozzle
- › Silencer
- › Shoulder strap

Technical data		dryCAT 15
Art.-No.		7002105
Negative pressure	mbar	160
Air volume	l/min	1400
Tank volume	l	5
Tank material		Plastic
Hose diameter	mm	32
Filter surface	cm ²	1550
Sound pressure level	dB(A)	74
Power cable length	m	6
Input power ~50 Hz	kW/V	0.85 / 230
Dimensions (L x W x H) approx.	mm	277 x 208 x 327
Weight approx.	kg	3.4

Accessory	Art.-No.
Replacement filter	7013554

dryCAT 16 L-Class – Handy and lightweight dry vacuum cleaner with practical shoulder strap

- ▶ Cartridge filter with large filter surface and manual filter cleaning ensures consistent suction power
- ▶ Extendable suction hose 0.5 - 1.5 m
- ▶ With blower function for blowing out gaps
- ▶ Ideal for work on the construction site




see page 2



Accessory	Art.-No.
Chassis	7013150
Hose with connection and handle	7013151
Fleece filter bag	7013152
Air filter	7013153
Shoulder strap	7013154
Crevice nozzle	7013155
Upholstery nozzle	7013156
Round nozzle with brush	7013157
Universal adapter	7013158
Furniture brush Ø 35 mm	7013130
Dust brush Ø 35 mm	7013135

Technical data		dryCAT 16 L-Class
Art.-No.		7002116
Negative pressure	mbar	230
Air volume	l/min	1500
Tank volume	l	6
Tank material		Plastic
Hose diameter	mm	30.5
Filter surface	cm ²	3000
Sound pressure level	dB(A)	76.8
Input power ~50 Hz	kW/V	1.2 / 230
Dimensions (L x W x H) approx.	mm	240 x 200 x 400
Weight approx.	kg	4.7



Scope of delivery:

- › Hose Ø 30.5 mm / 0.5 - 1.5 m with connection and handle
- › Fleece filter bag
- › Motor protection filter
- › Shoulder strap
- › Crevice nozzle
- › Upholstery nozzle
- › Round nozzle with brush
- › Universal adapter
- › reduction

flexCAT 104 – Comfortable and practical backpack dry vacuum cleaner for fatigue-free work

- ▶ Particularly suitable for cleaning work in confined spaces such as buses, trains, aeroplanes, theatres or cinemas
- ▶ Suitable for work on ladders" (e.g. vacuuming leaves from the gutter or cobwebs from the ceiling)
- ▶ With padded and adjustable carrying straps, accessory holders and on/off switch directly on the strap
- ▶ Motor equipped with overheating protection
- ▶ Suction hose can be rotated through 360°
- ▶ Dirt tank easy to clean

Equipment:

- › Hose & nozzle set
- › Cable holder
- › Nozzle holder



On/off switch directly on the strap



No pulling the vacuum cleaner behind you, making cleaning extremely convenient and flexible.

Technical data		flexCAT 104
Art.-No.		7003115
Air volume	l/min	2000
Negative pressure	mbar	200
Tank volume	l	4
Tank material		Plastic
Hose diameter	mm	35
Hose length	m	1.5
Sound pressure level	dB(A)	76
Filter surface	cm ²	1074
Power cable length	m	12.5
Input power ~50 Hz	kW/V	0.7 / 230
Dimensions (L x W x H) approx.	mm	251x226x571
Weight approx.	kg	5.8

Accessory	Art.-No.
Paper filter bag (PU10)	7013353
Fabric pre-filter	7013354
Air filter	7013365
Starter kit (includes 5x filter bags, 1x pre-filter)	7013367



Scope of delivery:

- › Plastic suction pipe
- › Suction hose
- › Round nozzle with brush
- › Flat nozzle
- › Floor nozzle with folding brush
- › Paper filter bag
- › Fabric filter
- › Foam filter

flexCAT 110 – Compact, low-cost dry vacuum cleaner

- ▶ Easy to stow away thanks to compact design
- ▶ Durable, hard-wearing components
- ▶ Ergonomic and practical design

Equipment:

- › Comprehensive accessories
- › Cable holder hook
- › Fabric bag filter
- › Accessory holder



Starter kit (includes 5x filter bag 7013455, Fleece filter 7013450)



Model	Starter kit
Art.-No.	7013456

Technical data		flexCAT 110
Art.-No.		7003105
Negative pressure	mbar	154
Air volume	l/min	1584
Tank volume	l	10
Tank material		Plastic
Hose diameter	mm	32
Hose length	m	1.5
Filter surface	cm ²	120
Motor cooling		Bypass
Sound pressure level	dB(A)	76
Power cable length	m	8.5
Input power ~50 Hz	kW/V	0.7 / 230
Dimensions (L x W x H) approx.	mm	333 x 327 x 320
Weight approx.	kg	4.6

Accessory	Art.-No.
Fleece filter	7013450
Paper filter bag (PU = 10 pcs.)	7013455



Scope of delivery:

- › 3x aluminium suction pipe Ø 32 mm length 330 mm each
- › Suction hose 1.5 m incl. handle with secondary air regulation
- › Floor nozzle with folding brush
- › Flat nozzle incl. brush attachment
- › Fleece filter

dryCAT 112Q / dryCAT 116Q – Quiet and efficient dry vacuum cleaner, ideal for hotels and households



- ▶ Compact and lightweight for effortless handling, flexible application options and easy storage
- ▶ Quiet operation for comfortable working
- ▶ Ergonomic and practical design
- ▶ Powerful motor for efficient cleaning
- ▶ Antibacterial polyester filter for hygienic filtration
- ▶ High-quality fleece filter bag of dust class M
- ▶ Simple, tool-free maintenance for fast service
- ▶ Quick and clean insertion of the filter bag
- ▶ Secure attachment of the appliance head to the container using flexible clamps
- ▶ Robust and durable components
- ▶ Convenient on/off foot switch
- ▶ Practical accessory holder directly on the device
- ▶ Integrated cable winder on the appliance head



Sustainable
• Consists of ≥ 50% recycled material



"Boost mode" for maximum suction power (only dryCAT 116Q)



dryCAT 116Q

dryCAT 112Q

Accessory	Art.-No.
Aluminium suction pipe	7013738
Chrome-plated telescopic suction tube Ø32mm	7010372
Floor nozzle	7010366
Upholstery nozzle Ø 32 mm	7010376
crevice nozzle Ø32mm	7010374
Round nozzle with brush Ø32mm	7010375
HEPA H13 Exhaust air filter	7010371
Hose Ø 32 mm / 2.5 mtr.	7013736
Handle with secondary air regulation	7013737
Fleece filter bag (quantity 10 pcs.)	7013739

Accessory dryCAT 112Q	Art.-No.
Exhaust air foam filter	7010362
Polyester filter	7013735

Accessory dryCAT 116Q	Art.-No.
Polycarbonate filter	7013740

Technical data		dryCAT 112Q	dryCAT 116Q
Art.-No.		7002170	7002175
Negative pressure	mbar	187	187
Air volume	l/min	2817	2817
Tank volume	l	12	16
Tank material		Plastic	Plastic
Hose diameter	mm	32	32
Sound pressure level	dB(A)	62	62
Connection cable length	m	10	12.5
Input power ~50 Hz	W/V	650 / 230	650 / 230
Dimensions (L x W x H) approx.	mm	355 x 285 x 330	355 x 285 x 377
Weight approx.		4.3	4.9

Scope of delivery dryCAT 112Q:

- › Aluminium-plastic suction pipes á 50 cm Ø 32 mm
- › Hose 2.5 m Ø 32 mm with connections
- › Handle with secondary air regulation
- › Floor nozzle with folding brush
- › Crevice nozzle
- › Round nozzle with brush
- › Polyester filter
- › Filter bag
- › Foam filter

Scope of delivery dryCAT 116Q:

- › Chrome-plated telescopic suction pipe Ø 32 mm
- › Hose 2.5 m Ø 32 mm with connections
- › Handle with secondary air regulation
- › Floor nozzle with folding brush
- › Crevice nozzle
- › Round nozzle with brush
- › Upholstery nozzle
- › Polyester filter
- › Filter bag
- › HEPA flat filter

dryCAT 133 IRSC / dryCAT 362 IRSCT-3 – Dry vacuum cleaner with automatic cleaning system



- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ Socket for connecting power tools
- ▶ Suction motors with noise filter for low-noise operation
- ▶ Cartridge filter with extremely large filter surface for consistent suction power
- ▶ Special seal between head and tank

- ▶ 2-part plug-in plastic-coated suction pipes. Very light and stable
- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Locking hose connection on the tank prevents unintentional disconnection of the hose during cleaning
- ▶ Ergonomic head design with cable hook



Solid steel chassis with tilting device for easy emptying (dryCAT 362 IRSCT-3)

with automatic cleaning!

- ▶ With automatic switch-on when a connected power tool is switched on



dryCAT 133 IRSC



dryCAT 362 IRSCT-3



Thanks to the automatic cycle, all filters are cleaned alternately while the vacuum cleaner continues to work uninterrupted without losing suction power. (dryCAT 362 IRSCT-3)



Plastic chassis and holders for nozzles and suction pipe (dryCAT 133 IRSC)

Technical data		dryCAT 133 IRSC	dryCAT 362 IRSCT-3
Art.-No.		7002135	7002370
Negative pressure	mbar	223	256
Air volume	l/min	3333	7933
Tank volume	l	33	62
Tank material		Stainless steel	Stainless steel
Hose diameter/length	mm/m	38 / 4	38 / 4
Number of motors		1	3
Motor cooling		Bypass	Bypass
Sound pressure level	dB(A)	72	76
Power cable length	m	8.5	8.5
Input power ~50 Hz	kW/V	1 / 230	2.5 / 230
Dimensions (L x W x H) approx.	mm	430 x 430 x 830	570 x 700 x 1140
Weight approx.	kg	13.8	31.6

Accessory dryCAT 133 IRSC		Art.-No.
	Filter bag - 15 litre capacity (PU = 5 pcs)	7010253
	Poly cartridge filter	7010256
	Suction hose Ø 29 mm / 5 m with connection for power tool	7013055

Accessory dryCAT 362 IRSCT-3		Art.-No.
	HEPA H14-cartridge filter	7010200
	HEPA H12 cartridge filter	7010201
	HEPA H13 cartridge filter	7010202
	Poly cartridge filter	7010203

Accessory dryCAT 362 IRSCT-3		Art.-No.
	Polycarbonate pre-filter cylindrical	7010204
	Conical polycarbonate pre-filter	7010205
	Poly cartridge filters	7010206
	Hose and nozzle set Ø 36 mm / 4 m	7013623



Scope of delivery dryCAT 133 IRSC:

- ▶ Plug-in suction pipe
- ▶ Suction hose 4 m
- ▶ Handle with secondary air regulation
- ▶ Floor nozzle dry
- ▶ Round nozzle with brush
- ▶ Flat nozzle
- ▶ Reductions
- ▶ Poly cartridge filter



Scope of delivery dryCAT 362 IRSCT-3:

- ▶ Suction pipe (steel) pluggable
- ▶ Suction hose 4 m
- ▶ Floor nozzle dry
- ▶ Round nozzle with brush
- ▶ Flat nozzle
- ▶ reduction
- ▶ 3 Poly cartridge filter

dryCAT series – H-class dry vacuum cleaner for toxic and harmful substances

- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ HEPA H14 filter cartridge with large filter surface for long-lasting, consistent suction power
- ▶ Optical filter monitoring indicator
- ▶ Antistatic components included in the scope of delivery

- ▶ Elastic and flexible suction hose withstands high loads and any kind of twisting
- ▶ Locking hose connection on the tank prevents unintentional disconnection of the hose during cleaning
- ▶ H-class filter bag enables safe disposal of hazardous substances

dryCAT 262 and dryCAT 250

- ▶ 2-motor model with separate on/off switches for energy-efficient operation
- ▶ Easy to maneuver on all surfaces thanks to the robust trolley with large wheels

dryCAT 250

- ▶ Convenient emptying of the container without removing the suction head
- ▶ Integrated connection with automatic start-up for compressed air and power tools



Antistatic

Scope of delivery:

- › 2 x suction pipe Ø 38 / 500 mm, plastic
- › 2 x suction pipe Ø 34 / 580 mm, chrome-plated
- › Hose, antistatic Ø 38 mm / 4 m with connections
- › Floor nozzle dry
- › Round nozzle with brush
- › Flat nozzle
- › Reduction Ø 38 / 36, antistatic,
- › Cartridge filter HEPA H14
- › Filter bag H-Class



dryCAT 133 IC H-Class



dryCAT 250 IRCA H-Class Pro



dryCAT 262 ICT H-Class


Now with HEPA H14 filter cartridge!

- ▶ Each individual filter cartridge is tested at the factory to rule out damage or holes in the filter material
- ▶ The filter efficiency is checked for each filter cartridge. The test report can be issued on request and by stating the serial number
- ▶ Each filter cartridge is assigned an individual serial number



dryCAT 262 ICT H-Class

Perfectly suited for vacuuming oak processionary moths!



Oak processionary moth set

- › 1 x 85 cm stainless steel pipe Ø 38mm
- › 5 x Filter bags
- › 5 x Disposal bags
- › 5 x cable ties 370 mm long

Art.-No. 7010336



see page 2

Technical data		dryCAT 133 IC H-Class	dryCAT 250 IRCA H-Class Pro	dryCAT 262 ICT H-Class
Art.-No.		7002155	7002355	7002255
Negative pressure	mbar	245	245	245
Air volume	l/min	3583	7166	7166
Tank volume	l	33	50	62
Tank material		Stainless steel	Stainless steel	Stainless steel
Hose diameter/length	mm/m	38 / 4	38 / 4	38 / 4
Number of motors		2	2	2
Motor cooling		Bypass	Bypass	Bypass
Sound pressure level	dB(A)	74	74	80
Power cable length	m	8.5	8	8.5
Input power ~50 Hz	kW/V	1 / 230	2 / 230	2 / 230
Appliance socket	kW	–	1.6	–
Connected load	mm	430 x 430 x 830	580 x 700 x 1150	520 x 520 x 960
Dimensions (L x W x H) approx.	kg	16	40	23
Weight approx.				

Accessory	Art.-No.
dryCAT 250 IRCA H-Class Pro	
H-class filter bag	7010331
Hose and nozzle set Ø 38 mm / 3 m	7013606
Consisting of: antistatic PU hose Ø 38 mm/3 m, including adapter 50mm / 38mm, 2 x plastic suction tube Ø 38 mm / 0.5 m, chrome-plated suction pipe Ø 34 mm / 2 x 0.58 m, flat nozzle Ø 38 mm, round nozzle with brush Ø 38 mm, metal floor nozzle with brush strip	
dryCAT 133 IC H-Class	
H-Class filter bag HEPA H14	7010330
dryCAT 262 ICT H-Class	
HEPA H14-cartridge filter	7010335
H-class filter bag	7010331
dryCAT 133 IC H-Class / dryCAT 262 ICT H-Class	
Suction hose Ø 29 mm / 5 m with connection for power tool	7013055

dryCAT 133 IRSC M-Class – M-Class dry vacuum cleaner for toxic and harmful substances with semi-automatic filter cleaning



- ▶ Vacuuming toxic and hazardous substances requires vacuum cleaners that also filter particles that would be released back into the environment by conventional models and pose a health risk.
- ▶ Dry version for dust and other solid particles
- ▶ Cartridge filter with extremely large filter surface ensures consistent suction power
- ▶ Motors equipped with copper windings and motor protection for a long service life
- ▶ Ergonomic head design with cable hook
- ▶ Suction motors with noise filter to ensure low-noise operation



see page 2

Technical data		dryCAT 133 IRSC M-Class
Art.-No.		7002145
Negative pressure	mbar	223
Air volume	l/min	3333
Tank volume	l	33
Tank material		Stainless steel
Hose diameter/length	mm/m	38 / 4
Number of motors		2
Sound pressure level	dB(A)	72
Power cable length	m	8.5
Connected load appliance socket	kW	max. 2.6
Input power ~50 Hz	kW/V	1 / 230
Dimensions (L x W x H) approx.	mm	430 x 430 x 830
Weight approx.	kg	15



Antistatic

Scope of delivery:

- ▶ 2 x suction pipe Ø 38 / 500 mm
- ▶ 2 x suction pipe Ø 34 / 580 mm chrome-plated
- ▶ Hose, antistatic Ø 38 mm / 4 m with connections
- ▶ Floor nozzle dry
- ▶ Round nozzle with brush,
- ▶ Flat nozzle
- ▶ Reduction Ø 38 / 36 antistatic,
- ▶ HEPA cartridge filter M class
- ▶ Filter bag M class

Accessory	Art.-No.
Upholstery nozzle	7013000
Flat nozzle - Ø 36 mm	7013001
Universal adapter Ø 26 mm / 32 mm / 36 mm	7013002
Connecting piece for suction hose Ø 38mm	7010450
Filter bag - 15 litres capacity (PU 5)	7013613
Filter bag M class	7010334
Cartridge filter polyester, exhaust air	7010256
Hose Ø 38mm/4 m with connections	7010211
Suction hose Ø 29 mm / 5 m with connection for power tool	7013055

flexCAT 378 CYC-PRO – Cyclone vacuum cleaner for use in locations with high dust loads

- ▶ Three motors with separate on/off switches
- ▶ No electrostatic charging due to electrostatic dissipation (neutralisation)
- ▶ Special seal between head and stainless steel tank
- ▶ Large wheels, easy to maneuver on all surfaces
- ▶ **Level 2:** The air flow drops into the cyclone system. Finer dust falls down and is transported back again.
- ▶ **Level 3:** Air and dust are filtered by microfibre bags
- ▶ **Level 4:** 99.9% cleaning through the HEPA cartridge filter

4-stage cleaning system

- ▶ **Level 1:** Air, dust and dirt are separated from each other by rotating the air downwards in the tank. Coarse dirt collects at the bottom of the tank and the flow is channelled to the cyclone holes

Technical data		flexCAT 378 CYC-PRO
Art.-No.		7003385
Negative pressure	mbar	251
Air volume	l/min	13950
Tank volume	l	78
Tank material		Steel
Hose diameter	mm	50
Number of motors		3
Motor cooling		Bypass
Sound pressure level	dB(A)	76
Power cable length	m	8.5
Input power ~ 50 Hz	kW/V	3.3 / 230
Dimensions (L x W x H) approx.	mm	600 x 620 x 1335
Weight approx.	kg	43

Accessory	Art.-No.
Cartridge filter HEPA H14	7010340
Filter bag 12l (PU = 10 pcs)	7010342



Multi-stage filter system for high filter efficiency



Cyclone system



Scope of delivery:

- ▶ 5 m antistatic hose Ø 50 mm
- ▶ HEPA H14 cartridge filter
- ▶ Filter bag 12 l (1 piece)

Don't forget to order your hose and nozzle set! (not included in the scope of delivery)

CHOOSE YOUR HOSE AND NOZZLE SET! Art.-No.

- SET 1: Hose and nozzle set standard version**
Comprises: Hose Ø 50 mm 3 m with connections Standard version, aluminium suction pipe Ø 50 mm, suction brush for Ø 50 mm, suction lip (PU 2), chrome-plated flat nozzle Ø 50 mm 7010343
- SET 2: Hose and nozzle set Antistatic version**
Comprises: Aluminium suction pipe Ø 50 mm, round nozzle with brush Ø 50 mm, antistatic hose Ø 50 mm 3 m with connections, antistatic rubber flat nozzle Ø 50 mm 7010344

dryCAT 150 - Industrial dry vacuum cleaner with manual filter cleaning

- Designed for intensive use
- Easy to maneuver on all surfaces thanks to the steel frame and large wheels
- Manual filter cleaning via lever on the housing
- Motor with copper winding and motor protection
- Effective filter effect thanks to L-class pocket filter (12000 cm²) and pre-filter
- Convenient emptying of the tank without removing the suction head and without contact with the dirty filter thanks to the detachable tank.

► Equipped with side channel compressor for continuous operation



Technical data		dryCAT 150
Art.-No.		7002375
Suction cup type		dry
Air volume	l/min	3650
Filter surface	cm ²	12000
Tank volume	l	50
Tank material		Steel
Hose diameter	mm	60
Sound pressure level	dB(A)	74
Cable length	m	8.5
Negative pressure	mbar	175
Input power ~50 Hz	kW/V	1.5 / 230
Motor cooling		1
Dimensions (L x W x H) approx.	mm	660x600x1600
Weight approx.	kg	62

Accessory	Art.-No.
Hose and nozzle set Ø 38 - 60 mm	7013718
Star filter M-Class for dryCAT 150	7013717
Polyester filter kit HEPA H13	7013716
HEPA H13 filter kit for dryCAT 150	7013715
Antistatic hose & nozzle set	7013613
Polycarbonate pre-filter	7013601
L-class pocket filter	7013600
Hose and nozzle set Antistatic	7010344
Standard hose and nozzle set	7010343

dryCAT 320 BAG-H Pro with endless dust bag

- For extracting sanding dust or wood sawdust in the workshop
- With 20 metres of endless collection bag for safe and dust-free disposal
- Easy to maneuver on all surfaces with large wheels
- Motor with copper winding and motor protection
- Socket (230V)
- HEPA H14 filter cartridge and additional pocket filter ensure high filtration efficiency
- Hose and nozzle set can be selected from 4 SET variants (see below)



Scope of delivery:

- Pre-filter class 5,000 cm²
- HEPA H14 cartridge filter
- Endless bag 20 m
- Mounting ring for cartridge filter

Accessory	Art.-No.
20 m endless collection bag	7013651
Pocket filter	7013644
HEPA H14 cartridge filter (requires Art.-No. 7010110)	7013602
Fastening ring and seal	7010110

**Don't forget to order your hose and nozzle set!
(not included in the scope of delivery)**

Technical data		dryCAT 320 BAG-H Pro
Art.-No.		7002185
Negative pressure	mbar	245
Air volume	l/min	10750
Tank volume		20 m endless hose
Hose diameter	mm	38 (50)
Filter surface	cm ²	2200 (+ pre-filter 5000 class M star filter)
Number of motors		3
Motor cooling		Bypass
Sound pressure level	dB(A)	76
Input power ~50 Hz	kW/V	3.3 / 230
Dimensions (L x W x H) approx.	mm	590 x 590 x 1120
Weight approx.	kg	72

CHOOSE YOUR HOSE AND NOZZLE SET!

	Art.-No.
SET 1: Antistatic hose and nozzle set Ø 50 mm / 4 m Consisting of: Antistatic PU suction hose Ø 50 mm / 4 m, including adapter 50 mm / 38 mm, aluminum suction tube, flat nozzle (antistatic Ø 50 mm; rubber), suction brush, suction lips	7013640
SET 2: Antistatic hose & nozzle set 4.5m Ø 38 mm Consist of: Antistatic suction hose, chrome-plated suction tubes, floor nozzle, chrome-plated flat nozzle	7013641
SET 3: Hose and nozzle set Ø 38 mm / 3 m Consisting of: antistatic PU hose Ø 38 mm/3 m, including adapter 50 mm / 38 mm, 2 x plastic suction pipe Ø 38 mm / 0.5 m, chrome-plated suction pipe Ø 34 mm / 2 x 0.58 m, Flat nozzle Ø 38 mm, round nozzle with brush Ø 38 mm, metal floor nozzle with brush strip	7013606
SET 4: Antistatic hose & nozzle set 5m Ø 50 mm Consisting of: Antistatic hose 5 m Ø 50 mm, including adapter 50 mm / 38 mm, aluminum suction tubes, flat nozzle (antistatic Ø 50 mm; rubber), suction brush	7013643