


Workstation table


AMT 500

Work and assembly table

- ▶ Infinitely height-adjustable assembly table
- ▶ Height adjustment using the foot hydraulics
- ▶ Robust helper in every workshop and working environment
- ▶ The **patented height adjustment system** ensures smooth and stepless height adjustment. Even with uneven load distribution or off-centre loading
- ▶ No jamming, no jerking
- ▶ Reacts quickly and at a well-dosed speed
- ▶ Clear width of 1105 mm between the lifting columns
- ▶ Four swivel rollers, two with brakes

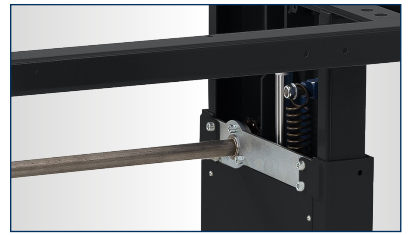

- Lifting units are protected from dirt and damage

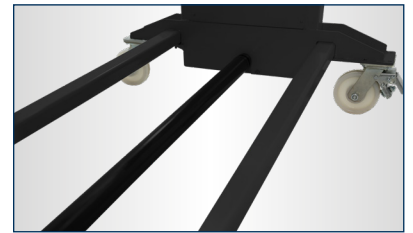

- Lower synchronising shaft can optionally disappear under a shelf



- Four rollers with two brakes ensure flexibility and stability

Steel perforated grid plate	
Material thickness	approx. 11.5 – 13 mm
Bores	with radius 2 mm
Corners and edges	with radius 3/6 mm
Grid	50 x 50 mm
Side panel	50 mm high
Bore spacing	50 mm
Side cheek	



Optional sheet steel shelf
offers space for tools, accessories, base cabinet, etc. (Art. No. 6110500)



Model		AMT 500	AMT 500B	AMT 500 BL	AMT 500 SL
Article No.		5191500	5191501	5191502	5191505
Technical data					
Load capacity	kg	500	500	500	500
Support plate		–	Worktop Beech multiplex	Perforated panel Beech multiplex	Steel perforated grid plate
Platform dimensions (L x W)	mm	1460 x 740	–	–	–
Dimensions of panels (L x W x H)	mm	–	1600 x 790 x 30	1600 x 790 x 30	1600 x 790 x 50
Total height max.	mm	970	1000	1000	1000
Useful stroke	mm	300	300	300	300
Lifting unit		1 x left	1 x left	1 x left	1 x left
Swivel roller ø	mm	125	125	125	125
Dimensions (L x W x H) approx.	mm	1460 x 740 x 670	1460 x 740 x 700	1460 x 740 x 700	1460 x 740 x 720
Weight approx.	kg	120	140	140	290