

 minimax

 **holzcraft**[®]

WOODWORKING MACHINES



MAIN CATALOGUE 2025/26

OFFER FOR OUR CUSTOMERS WHO ARE ENTREPRENEURS AND NOT CONSUMERS

WOOD AND BANDSAWS



HBS RS

Cutting band saws with various feed options

- ▶ Torsion-resistant machine housing
- ▶ Solid cast flywheels, cambered (1/3) and bronze chip scraper
- ▶ Grey cast iron saw table
- ▶ Top and bottom saw band guide for saw band up to 80 mm (940 to 90 mm)
- ▶ Saw band tension indicator
- ▶ Drip lubrication system with felt glides
- ▶ Self-braking motor
- ▶ Automatic star-delta start-up
- ▶ Emergency stop switch
- ▶ Saw bands with indication of the area of application available on request

Special manual version:

- ▶ Reinforced base with double column
- ▶ Saw band clamping unit made of steel with guide lubrication system

Special hydraulic version:

- ▶ Reinforced base with double column
- ▶ Hydraulic saw band tensioning unit with hand pump and guide lubrication system

! The table, motor and all attachments must be assembled on site.

EQUIPMENT OPTIONS

Equipment options HBS 740 RS3	Article No.
Upper saw band guide made of bronze	5161551
Lower saw band guide made of bronze	5161552
Tilting of the table via hand crank and gear rack	5161553
Add-on roller table	5161554
Motor 11 kW	5161555
Reversed design of the operating side	5161559

Equipment options HBS 940 RS3	Article No.
Upper saw band guide made of bronze	5161571
Lower saw band guide made of bronze	5161572
Tilting of the table via hand crank and gear rack	5161573
Add-on roller table	5161574
Motor 15 kW	5161575
Reversed design of the operating side	5161579

Equipment options HBS 940 RS3 Manual / Hydraulic	Article No.
Upper saw band guide made of bronze	5161590
Lower saw band guide made of bronze	5161591
Tilting of the table via hand crank and gear rack	5161592
Add-on roller table	5161593
Motor 15 kW	5161594
Reversed design of the operating side (Manual)	5161597
Reversed design of the operating side (Hydraulic)	5161598

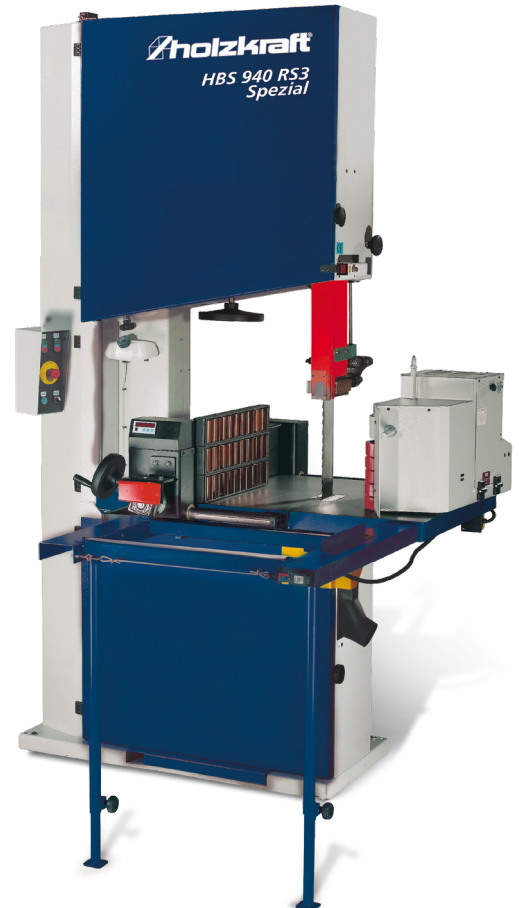


Fig. shows accessories feed unit (Article No.: 5152421)

Model	HBS 740 RS3	HBS 940 RS3	HBS 940 RS3 Special manual ⁽²⁾
Article No.	5152374	5152394	5152395
Model			HBS 940 RS3 Special hydraulic ⁽³⁾
Article No.			5152396
Technical data			
Table dimensions (L x W x H)	860 x 1100 x 980 mm	860 x 1100 x 1060 mm	860 x 1100 x 1060 mm
Cutting height max.	450 mm	550 mm	600 mm
Cutting width max.	710 mm	910 mm	720 mm
Cutting speeds	680 min ⁻¹	570 min ⁻¹	570 min ⁻¹
Flywheel diameter	730 mm	930 mm	930 mm
Saw band length	5310 - 5420 mm	6580 - 6670 mm	6580 - 6670 mm
Saw band width max.	80 mm	90 mm	90 mm
Suction port	2 x Ø 140 mm	2 x Ø 140 mm	2 x Ø 140 mm
Motor power ~50 Hz	9 kW/ 400 V	11 kW/ 400 V	11 kW/ 400 V
Dimensions (L x W x H) approx.	2530 x 900 x 1250 mm	3000 x 870 x 1550 mm	3000 x 870 x 1550 mm
Weight approx.	670 kg	990 kg	1030 kg

(2) Reinforced version (3) Reinforced version with hydraulic belt tensioning. Saw bands depending on material on request