

STANDARD MACHINES



MAIN CATALOGUE 2025/26

OFFER FOR OUR CUSTOMERS WHO ARE ENTREPRENEURS AND NOT CONSUMERS

Feed devices

VSA 2032 / VSA 2038L / VSA 2048L

Feed devices for table routers. Proven quality

- ▶ Consistent feed speed without loss of power
- ▶ Clockwise and anti-clockwise rotation
- ▶ Includes tripod, individually swivelling and adjustable for horizontal and vertical use
- ▶ Speeds infinitely adjustable via rotary knob
- ▶ Speed transmission through conical pulley belt drive



VSA 2032

Tripod 1050



Three rolls

Four speeds

VSA 2038L

Tripod 1050



Three rolls

Eight speeds

VSA 2048L

Tripod 1050



Four rollers

Eight speeds

Accessories VSA 2032

	Article no.
Folding device	5119510
Feed roller Ø80mm (width 28 mm)	5119520


VSA accessories 2038L / VSA 2048L

	Article no.
Folding device	5119511
Feed roller Ø120mm (width 60 mm) 50 Shore	5119525
Spare roller Ø120mm (width 60 mm) 50 Shore without rim	5119526
Feed roller Ø120mm (width 60mm) 40 Shore for smooth surfaces	5119527
Feed roller Ø118mm (width 50mm) 65 Shore for rough surfaces	5119528


Tripod accessories

	Article no.
Tripod 1050	5119500
Tripod 1050 PLUS	5119505
EASY joint (except VSA 400DC)	5119509

Folding device



Feed roller



Model		VSA 2032	VSA 2038L	VSA 2048L
Article no.		5119032	5119038	5119048
Technical data				
max. radius	mm	660		1050
Number of feed rollers	Pc	3	3	4
Roller diameter	mm	80		120
Roller width	mm	28		60
Spring travel of the rollers	mm	15		20
speeds	m/min	4/8/9/18 (4 stages)	2/4/5.5/6.5/11/13/16.5/33 (8 stages)	
Motor power ~50 Hz	W/V	180 / 400	750 / 400	
Dimensions (L x W x H) approx.	mm	1222 x 152 x 566	1523 x 220 x 540	1665 x 220 x 540
Weight approx.	kg	32.5	69.5	73.5

STANDARD MACHINES



MAIN CATALOGUE 2025/26


OFFER FOR OUR CUSTOMERS WHO ARE ENTREPRENEURS AND NOT CONSUMERS

VSA 4V / VSA 4V DC / VSA 400 DC

Feed devices with infinitely variable speed control

- Consistent feed speed without loss of power
- Speeds Infinitely adjustable via rotary knob
- Speed transmission through conical pulley belt drive
- Clockwise and anti-clockwise rotation

VSA 4V

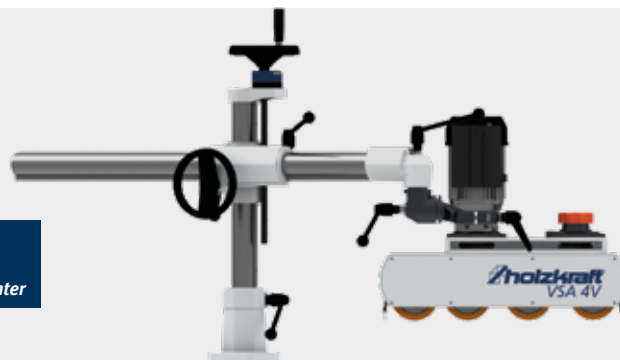

Tripod 1050 PLUS
with high-quality
clamping levers and counter

Four rollers

Stepless
adjustable via rotary knob

VSA 4V DC



Tripod 1050 PLUS
with high-quality
clamping levers and counter

Four rollers

Stepless
adjustable via rotary knob
and digital display

VSA 400DC



Tripod 1050 PLUS
with high-quality
clamping levers and counter


Tripod

Four rollers


Stepless
adjustable via rotary knob

Accessory	Article no.
Folding device	5119511
Feed roller Ø120mm (width 60 mm) 50 Shore	5119525
Spare roller Ø120mm (width 60 mm) 50 Shore without rim	5119526
Feed roller Ø120mm (width 60mm) 40 Shore for smooth surfaces	5119527
Feed roller Ø118mm (width 50mm) 65 Shore for rough surfaces	5119528
Tripod accessories	Article no.
Tripod 1050	5119500
Tripod 1050 PLUS	5119505
EASY joint (except VSA 400DC)	5119509

Folding device



Feed roller



Model		VSA 4V	VSA 4V DC	
Article no.		5119104**	5119114	
Technical data				
max. radius	mm		1050	
Number of feed rollers	Pc	4	4	
Roller diameter	mm		120	
Roller width	mm		60	
Spring travel of the rollers	mm	20	20	
speeds	m/min	3 - 18 stepless, mechanical	0.5 - 25 stepless, electronic	
Motor power ~50 Hz	W/V	750 / 400	750 / 400	
Dimensions (L x W x H) approx.	mm	1670 x 206 x 540	1670 x 220 x 540	
Weight approx.	kg	75.5	78.5	

STANDARD MACHINES



MAIN CATALOGUE 2025/26

OFFER FOR OUR CUSTOMERS WHO ARE ENTREPRENEURS AND NOT CONSUMERS

VSA 2038 L PLUS / VSA 2048 L PLUS

Feed devices with 1050 PLUS tripod, high-quality clamping levers and counter

- Consistent feed speed without loss of power
- Includes tripod, individually swivelling and adjustable for horizontal and vertical use
- Speeds infinitely adjustable via rotary knob
- Speed transmission through conical pulley belt drive
- Clockwise and anti-clockwise rotation

VSA 2038L PLUS

*Tripod 1050 PLUS
with high-quality
clamping levers and counter*



Three rolls

Eight speeds

VSA 2048L PLUS


*Tripod 1050 PLUS
with high-quality
clamping levers and counter*




Four rollers

Eight speeds

Accessory	Article no.
Folding device	5119511
Feed roller Ø120mm (width 60 mm) 50 Shore	5119525
Spare roller Ø120mm (width 60 mm) 50 Shore without rim	5119526
Feed roller Ø120mm (width 60mm) 40 Shore for smooth surfaces	5119527
Feed roller Ø118mm (width 50mm) 65 Shore for rough surfaces	5119528
Tripod accessories	Article no.
Tripod 1050	5119500
Tripod 1050 PLUS	5119505
EASY joint	5119509



Model		VSA 2038L Plus	VSA 2048L Plus
Article no.		5119039	5119049
Technical data			
max. radius	mm	1050	
Number of feed rollers	Pc	3	4
Roller diameter	mm	120	
Roller width	mm	60	
Spring travel of the rollers	mm	20	
Speed settings (8)	m/min	2/4/5.5/6.5/11/13/16.5/33	
Motor power ~50 Hz	W/V	750 / 400	
Dimensions (L x W x H) approx.	mm	1523 x 220 x 540	1665 x 220 x 540
Weight approx.	kg	71.5	75.5



STANDARD MACHINES



MAIN CATALOGUE 2025/26

OFFER FOR OUR CUSTOMERS WHO ARE ENTREPRENEURS AND NOT CONSUMERS

VSA 2038 L EASY / VSA 2048 L EASY

Feed units with eight speeds and patented EASY joint

- Consistent feed speed without loss of power
- Includes EASY tripod with patented joint - no more double adjustment necessary
- Eight speeds possible, speed selection via switch and change gearbox
- Clockwise and anti-clockwise rotation

VSA 2038 L EASY

*Tripod 1050 EASY
facilitates and speeds up the
handling*



Three rolls

Eight speeds

VSA 2048 L EASY

*Tripod 1050 EASY
facilitates and speeds up the
handling*



Four rollers

Eight speeds

TRIPOD 1050 EASY

- Fast and simple operation
- Patented joint
- No more double setting necessary
- Adjust the position of the feed unit conveniently and fix it in place with just one clamping lever
- Counter for precise height adjustment
- Maximum throat depth 1050 mm
- Dimensions (L x W) approx. 1050 x 540 mm
- Weight approx. 44 kg



PATENTED


Locking device

Security without compromise

- The locking mechanism prevents unintentional movement of the feed unit and ensures accident-proof positioning.

Accessory	Article no.
Folding device	5119511
Feed roller Ø120mm (width 60 mm) 50 Shore	5119525
Spare roller Ø120mm (width 60 mm) 50 Shore without rim	5119526
Feed roller Ø120mm (width 60mm) 40 Shore for smooth surfaces	5119527
Feed roller Ø118mm (width 50mm) 65 Shore for rough surfaces	5119528

Tripod accessories	Article no.
Tripod 1050 Easy	5119501
EASY joint	5119509



Model		VSA 2038 L EASY 5119040	VSA 2048 L EASY 5119050
Article no.			
Technical data			
max. radius	mm	1050	
Number of feed rollers	mm	3	4
Roller diameter	mm	120	
Roller width	mm	60	
Spring travel of the rollers	mm	20	
Speed settings (8)		2 – 33	
Speed levels	m/min	2 / 4 / 5,5 / 6,5 / 11 / 13 / 16,5 / 33	
Drive motor power ~ 50 Hz	kW/V	0.75 / 400	
Dimensions (L x W x H) approx.	mm	1524 x 220 x 540	1665 x 220 x 540
Weight approx.	kg	71.5 including tripod	75.5 including tripod

Feed roller

