



*WOODWORKING MACHINES
FOR THE HOME AND CRAFTSMAN*



MAIN CATALOG 2025/26

OFFER FOR OUR CUSTOMERS WHO ARE ENTREPRENEURS AND NOT CONSUMERS

15. October 2025, 8:42 am

SCROLL SAW



Scroll saws


DKS 504 Vario

Scroll saw suitable for mould making, precision mechanics, model making, toy manufacturing

- Ideal for fine sawing work
- For processing softwood, plastic and similar materials
- Robust cast construction guarantees quiet, low-vibration operation
- Can be used on any workbench or work surface thanks to its compact size
- Free-swinging saw blade holder for standard saw blades with cross pin

- Can be connected to an external extraction unit via suction nozzle
- Includes universal hand sander with many possible applications, e.g. sanding, cutting, drilling, polishing (tool set required)

- Infinitely variable stroke rate regulation
- Work table can be tilted from 0° to +45°
- Flexible LED light for illuminating the cutting area
- Universal hand sander integrated

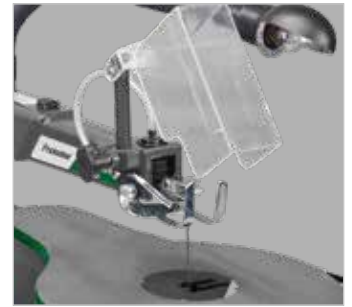

Blow-off device removes coarse sawdust from the cutting area



Table angle precisely adjustable via scale



Saw blades
Made in Germany



①

②

③

SCOPE OF DELIVERY

- Saw blade 133 x 3 x 0.3 mm 15 Z
- Saw blade 133 x 3 x 0.3 mm 18 Z
- Universal sander without tools

Model		DKS 504 Vario
Art. no.		5902504

Technical data		
Table dimensions (L x W)	mm	414 x 254
Cutting height at 90° max.	mm	52
Cutting height at +45° max.	mm	20
Throat depth	mm	405
Saw blade length	mm	133
Stroke rate	min ⁻¹	550 – 1,600
Nominal suction nozzle size outside	mm	35
Universal sander speed	min ⁻¹	1,650 – 4,800
Mounting Ø	mm	3.1
Input power ~ 50 Hz	W/V	90 / 230
Dimensions (L x W x H) approx.	mm	630 x 290 x 380
Weight approx.	kg	12

Pin saw blades	Z/cm	PQ	Art. no.
① for wood, plastic, plaster 135 x 3.0 x 0.25 mm usable saw length 127 mm	10	6	5911628
② for Wood 135 x 6.0 x 0.4 mm	6	6	5911660
③ for metal metal 135 x 6.0 x 0.4 mm	12	6	5911661

Accessories	Art. no.
④ Tool set 103 pieces in wooden case For various applications e.g. for sanding, cutting, polishing	5912504

