


PRO-R ROUND SLING




They are made of very high quality polyester yarns and manufactured in compliance with EN 1492-2 standard, with 7:1 safety standard. They have a compact design and are color coded, according to standard specs. The low weight and high nominal load (up to 1000 tons) are the main advantages of these types of textile slings.

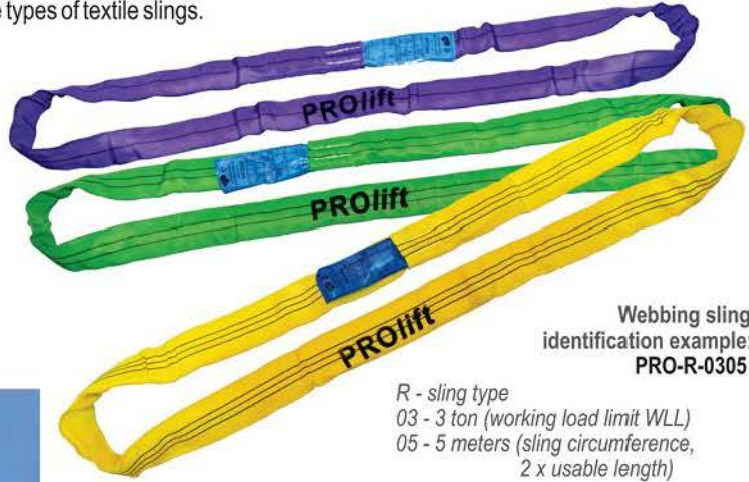

Webbing sling identification example:
PRO-R-0305

R - sling type
03 - 3 ton (working load limit WLL)
05 - 5 meters (sling circumference, 2 x usable length)

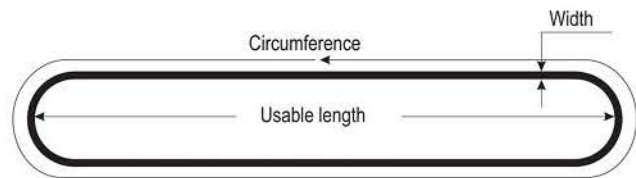

Model/ Features	W.L.L. (t)	Thickness aprox. (mm)	Width aprox. (mm)	Usable length (m)		Weight (kg/m)	
				min	max	SF 7 : 1	SF 6 : 1
PRO-R-01	1	6	40	0.5		0.35	0.3
PRO-R-02	2	7	50	0.5		0.52	0.44
PRO-R-03	3	8	60	0.5		0.74	0.65
PRO-R-04	4	9	70	0.5		0.91	0.83
PRO-R-05	5	11	75	0.5		1.29	1.01
PRO-R-06	6	12	80	1		1.39	1.19
PRO-R-08	8	13	90	1		1.75	1.5
PRO-R-10	10	15	100	2		2.28	1.95
PRO-R-12	12	16	110	2		2.87	2.46
PRO-R-15	15	18	125	2		3.47	2.97
PRO-R-20	20	20	150	2.5		5.44	4.66
PRO-R-25	25	24	180	2.5		6.82	5.84
PRO-R-30	30	32	200	2.5		10.8	9.23
PRO-R-40	40	40	200	2.5	80	14.2	12.1
PRO-R-50	50	45	220	2.5		16.3	14.1
PRO-R-60	60	65	240	4		20.2	17.3
PRO-R-80	80	70	260	4		25.9	22.2
PRO-R-100	100	80	290	4		30.3	26
PRO-R-200	200	120	450	5		74.6	64
PRO-R-300	300	160	525	5		92.2	79
PRO-R-400	400	200	670	5		114.8	98.4
PRO-R-500	500	220	750	8		141.4	121.2
PRO-R-600	600	240	820	8		169.2	145
PRO-R-700	700	260	870	8		196.0	168
PRO-R-800	800	280	930	9		224.0	192
PRO-R-900	900	300	990	9		250.1	215
PRO-R-1000	1000	320	1050	9		277.7	238