


PRO-W WEBBING SLING

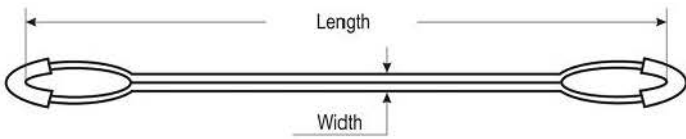

The webbing slings are made from high quality synthetic fibers, with up to 4 layers of polyester and strengthened mesh.

They have a minimum potential elongation and they are available for working load limits ranging between 1 and 50 tons.

They are made in compliance with EN 1492-1 and are color coded.

Their working temperature range is between -40°C and +100°C.

The safety factor is 7:1, on demand we can provide slings with different safety factor.

Standard type provided is B2 (double ply); on demand, we can produce type B1 (one ply) and type C (webbing slings fitted with steel accessories).

Webbing slings PRO-W made by PROlift have CE type Approval (European Machinery Directive).

Webbing sling identification example: PRO-W-0305

*W - sling type
03 - 3 ton (working load limit WLL)
05 - 5 meters (sling length)*

Model / Features	W.L.L. (t)	Thickness aprox. (mm)	Width aprox. (mm)	Length (m) min	Length (m) max	Eye length aprox. (mm)	Weight (kg/m)
PRO-W-01	1	7.5	50	1	100	300	0.22
PRO-W-02	2	7.5	60	1	100	300	0.45
PRO-W-03	3	7.5	90	1	100	350	0.71
PRO-W-04	4	7.5	120	2	100	500	1.02
PRO-W-05	5	7.5	150	2	100	550	1.21
PRO-W-06	6	7.5	180	2	100	600	1.42
PRO-W-08	8	7.5	240	2	100	700	1.89
PRO-W-10	10	7.5	300	3	100	800	2.34
PRO-W-12	12	10	300	3	100	900	2.98
PRO-W-16	16	15	240	3	100	700	3.78
PRO-W-24	24	20	300	3	100	850	7.95

