

# ***AIR CONDITIONERS***



## Air conditioners PAC - Mobile air conditioner with Bluetooth and Wifi control


- ▶ Clear LED display for user-friendly operation
- ▶ Practical 24-hour timer function integrated
- ▶ Integrated sleep mode allows the set temperature to rise by 1 °C every two hours
- ▶ Connection for condensate drain, no manual draining necessary
- ▶ Can be conveniently controlled remotely via the supplied Bluetooth remote control or Wifi

- ▶ Removable air filter for effortless cleaning
- ▶ Good heat dissipation thanks to the supplied window kit
- ▶ Mobile thanks to four transport rollers
- ▶ Integrated thermostat

- ▶ **PAC 9000**
- ▶ Different modes: Cooling, ventilation and dehumidification possible

### PAC 12000 H


- ▶ Different modes: Cooling, ventilation, heating and dehumidification
- ▶ Practical heating function Up to 30 °C room temperature

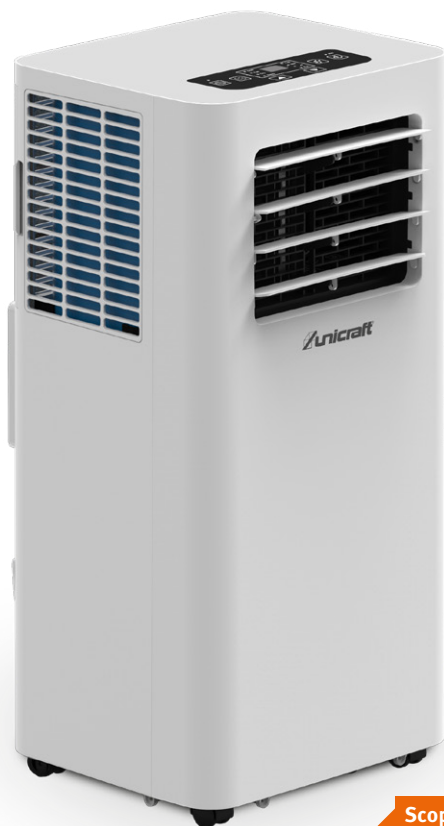

PAC 9000

#### Scope of delivery:

- ▶ 1x condensate drain hose
- ▶ 1x exhaust air hose with window kit
- ▶ 1x remote control



› Clear control panel with display of current mode and actual temperature



› Window kit with exhaust air hose (1.5 m)

Model		PAC 9000	PAC 12000 H
Art. no.		6551220	6551225
<b>Technical data</b>			
Cooling capacity (kW)	kW	2.64	3.52
Cooling capacity (Btu/h)	Btu/h	9000	12000
Air volume Stage max.	m <sup>3</sup> / h	350	440
Number of fan stages		2	4
Temperature min.- max.	°C	16 – 30	16 – 30
Recommended room volume	m <sup>3</sup>	80	105
Sound power level LWA	dB(A)	65	65
Sound pressure level LpA	dB(A)	56	56
Electrical connection ~50 Hz	V	230	230
Input power	kW	1.01	1.35
Energy efficiency class		A (cooling)	A (cooling) / A+ (heating)
Exhaust air hose	m	1.5	1.5
Cable length	m	1.8	1.8
Dimensions (L x W x H)	mm	325x295x702	365x320x745
Weight (net) approx.	kg	23.8	26.5

Accessory	Art. no.
Window sealing set (PAC 9000 / 12000 H)	6551300
Device - hose connection (PAC 9000 / 12000 H)	6551301
Window - hose connection (PAC 9000 / 12000 H)	6551302
Exhaust air hose (PAC 9000 / 12000 H)	6551303

# Air conditioners

## SC-K D series – Mobile units for efficient cooling at the desired location

- ▶ Effective spot coolers for rapid spot cooling
- ▶ Flexible cooling thanks to tilting and swivelling cold air ducts
- ▶ Easy to manoeuvre thanks to compact design and swivel rollers with parking brake
- ▶ Robust sheet steel construction

### ab SC-K 2700 D

- ▶ Cooling down to 0°C possible thanks to adjustable mode
- ▶ Integrated thermostat with digital display of set and actual temperature


### SC-K 5300 D additional

- ▶ Cable winding device creates order without the risk of tripping

- ▶ Suitable for cooling applications in workshops, network rooms, commercial kitchens and other environments
- ▶ Fill level warning light and warning signal when the condensate container is full
- ▶ No preliminary installation work, can be used immediately
- ▶ Use of environmentally friendly organic refrigerants



Clear control panel SC-K 2700 D / SC-K 3500 D



Clear control panel, Control panel SC-K 5300 D

Model	SC-K 2000	SC-K 2700 D	SC-K 3500 D	SC-K 5300 D
Art. no.	6550000	6550005	6550010	6550015

Technical data		SC-K 2000	SC-K 2700 D	SC-K 3500 D	SC-K 5300 D
Cooling capacity (kW)	kW	2	2.7	3.5	5.3
Air volume Stage max.	m <sup>3</sup> /h	230	400	600	800
Number of fan stages		1	2	2	2
Achievable room temperature	°C	20	0	0	0
Recommended room size	m <sup>3</sup>	12.5 – 25	20 – 45	27.5 – 57.5	50 – 102.5
Condensate water tank	l	3	5	7	25
Total length of exhaust air hose for cold air	mm	350	350	350	350
Outer diameter of exhaust air hose for cold air	mm	120	120	120	120
Outer diameter	mm	–	160	200	370
Connection for hot air					
Number of exhaust air connections		1	2	3	3
Sound power level LWA	dB(A)	62	65	67	75
Sound pressure level LpA	dB(A)	52	55	57	65
Energy efficiency class		A	A	B	B
Input power	kW	0.7	0.95	1.4	2.2
Connection voltage ~50 Hz	V	230	230	230	230
Dimensions (L x W x H) approx.	mm	465x287x589	405x430x855	430x493x944	560x620x1135
Weight approx.	kg	25.5	42	49	95

Accessories	Art. no.
<b>Air filter</b>	
SC-K 2000	6550100
SC-K 2700 D	6550101
SC-K 3500 D	6550102
Front SC-K 5300 D	6550103
Rear SC-K 5300 D	6550104
<b>Extension cable 6 metres</b>	
SC-K 2700 D	6550110
SC-K 3500 D	6550111
SC-K 5300 D	6550112

## Monobloc wall-mounted air conditioner MAC 2950 H - Space-saving air conditioner without outdoor unit

- ▶ Elegant design that blends seamlessly into the living space
- ▶ Simple wall mounting without an additional outdoor unit on the façade
- ▶ Can be used as an energy-efficient cooling solution in almost any living space
- ▶ Clear LED display for the current temperature and the selected mode
- ▶ Four selectable modes: Cooling, heating, fan and dehumidification function
- ▶ Integrated "Silent Mode" for extremely quiet operation at night, only 39 dB.
- ▶ Air conditioner can be controlled via app or remote control
- ▶ Integrated thermostat



### Advantages of an air conditioning unit without outdoor unit

- › No outdoor unit on the façade
- › No time-consuming assembly or disassembly, e.g. before transporting residential or construction containers
- › No external noise emissions

Model		MAC 2950 H
Art. no.		6551200
<b>Technical data</b>		
Cooling capacity (kW)	kW	2.93
Cooling capacity (Btu/h)	Btu/h	10000
Heat output	kW	2.63
Air volume Stage max.	m <sup>3</sup> /h	520
Recommended room size	m <sup>3</sup>	75
Number of fan stages		3
Temperature range min. - max.	°C	16 – 30
Refrigerant type		R290
Sound power level LWA	dB(A)	58
Sound pressure level LpA	dB(A)	48
Electrical connection ~50 Hz	V	230
Energy efficiency class		A (cooling) / A+ (heating)
Power consumption (cooling)	kW	1.12
Power consumption (heating)	kW	0.73
Dimensions (L x W x H)	mm	1000 x 205 x 585
Weight approx.	kg	42.5



› Simple wall mounting thanks to the drilling template supplied



› Clear LED display for the current temperature and the selected mode

#### Standard equipment:

Condensate drain  
Room thermostat  
Cleanable room air filter

#### Scope of delivery:

Remote control  
Mounting material


YOU CAN FIND MORE PRODUCTS IN OUR MAIN CATALOGUES



[aircraft-compressors.com](http://aircraft-compressors.com)



[cleancraft.eu](http://cleancraft.eu)



[craftweld.de](http://craftweld.de)



[holzkraft-machines.com](http://holzkraft-machines.com)



[holzstar.com](http://holzstar.com)



[metalkraft-machines.com](http://metalkraft-machines.com)




[optimum-machines.com](http://optimum-machines.com)



[schweisskraft.com](http://schweisskraft.com)

DISCOVER OUR PRODUCT VIDEOS NOW!



Do you already know our YouTube channel **Stürmer Maschinen GmbH**?

Here you will find a wide-ranging and high-quality selection of product videos, sorted by brand. We always aim to provide you with a wide selection of high-quality videos.

Subscribe to our YouTube channel so you don't miss any of our new videos:  
[www.stma.de/youtube-de](http://www.stma.de/youtube-de)

Your specialised dealer:

### Distribution Germany

**UNICRAFT – Stürmer Maschinen GmbH**

Dr.-Robert-Pfleger-Str. 26

96103 Hallstadt / Germany

Phone: +49 (0) 9 51/96 555-0

email: [info@unicraft.de](mailto:info@unicraft.de)

### Production and distribution Austria

**Aircraft Kompressorenbau GmbH**

Gewerbestraße Ost 6

4921 Hohenzell / Austria

Phone: +43 (0) 77 52 - 70 929 - 0

E-Mail: [info@aircraft.at](mailto:info@aircraft.at)

Web: [www.aircraft.at](http://www.aircraft.at)

- This offer is aimed exclusively at entrepreneurs, dealers or traders who are acting in the exercise of their commercial or self-employed activity when concluding this purchase
- This constitutes an express CONDITION FOR THE CONCLUSION OF THE CONTRACT. Consumers within the meaning of § 13 BGB are excluded from the sale
- With the publication of this price catalogue, all previous lists become invalid
- Prices are non-binding recommended prices, subject to change, in €, plus the applicable statutory VAT, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs.
- No liability is accepted for printing errors, mistakes or incorrect presentation.
- We reserve the right to make technical and visual changes
- Fig. partly with optional accessories
- Delivery shall be made exclusively in accordance with our terms of delivery and payment
- Sold through specialised dealers
- The goods remain our property until full payment has been made
- In the event of resale to third parties, our retention of title shall remain in force
- Reproduction and reprinting in any way, even in extracts, always require our written authorisation
- For products with a recognised guarantee: Further information on the scope, duration and content of the guarantee, as well as details of the guarantor, can be found at [www.stuermer-maschinen.de](http://www.stuermer-maschinen.de) or by contacting Stürmer Maschinen GmbH directly.
- Please note that some of the machines in this brochure are subject to transport packaging flat rates for transport units or packaging and packaging costs. These have been marked accordingly in the catalogue.
- The entire catalogue is protected by copyright. In addition, we register trade mark, patent and design rights to protect our products, insofar as this is possible in individual cases. We strongly oppose any infringement of our intellectual property.