


# ***INFRARED LACQUER DRYER***



# Infrared lacquer dryer

## Infrared lacquer dryer ILT 1

- ▶ Sturdy construction made of aluminium and stainless steel
- ▶ Dries the paint layer efficiently from the outside and inside, saving time and preventing bubbles
- ▶ 360° swivelling and rotatable lamp housing
- ▶ Ball bearing rollers with parking brake
- ▶ Timer adjustable via rotary switch

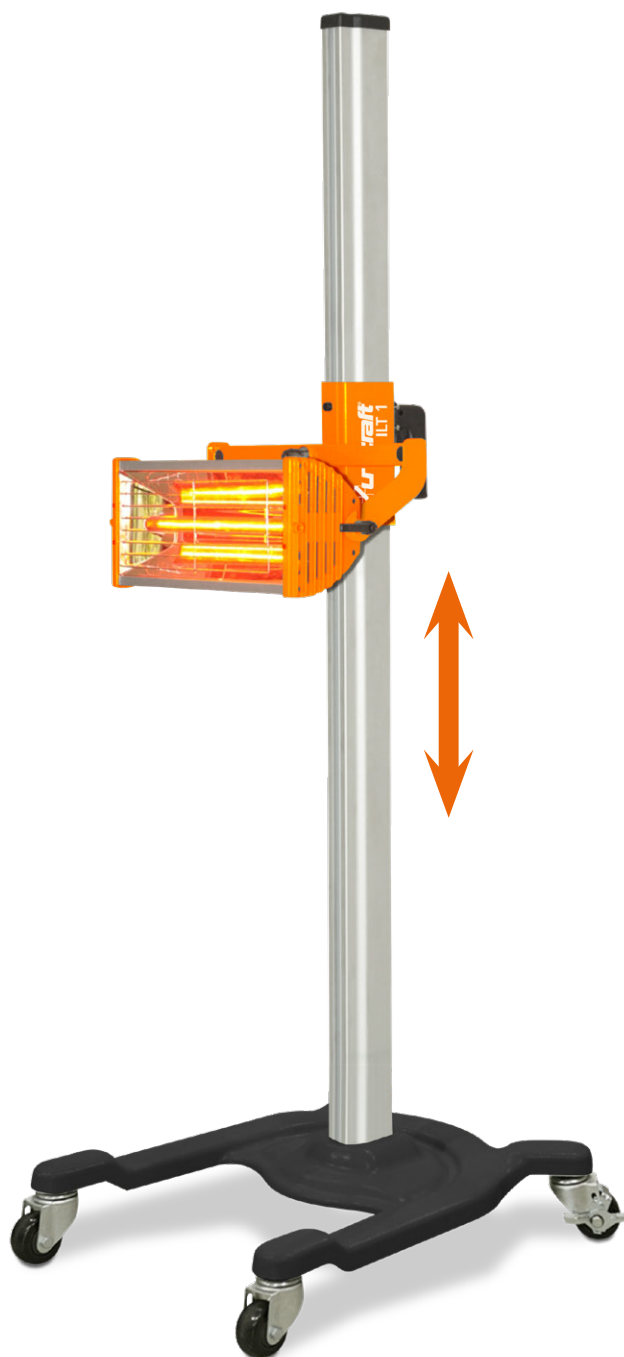

<b>Model</b>	<b>ILT 1</b>
Art. no.	6205001

<b>Technical data</b>	
Drying surface	800 x 450 mm
Temperature	30 – 100 °C
Timer switch	0 - 60 min
Input power	1 kW 230 V/~50 Hz
Weight approx.	15 kg

<b>Accessories</b>	<b>Article no.</b>
Replacement tube for ILT 1	6205006

## Infrared lacquer dryer ILT 2

- ▶ Dries the paint layer efficiently from the outside and inside, preventing bubbles and saving time
- ▶ Ball bearing rollers with parking brake
- ▶ Integrated timer function
- ▶ High-quality V-Power quartz halogen shortwave infrared fluorescent tubes
- ▶ Timer adjustable via rotary switch
- ▶ 360° swivelling and rotatable lamp housing



<b>Model</b>	<b>ILT 2</b>
Art. no.	6205002

<b>Technical data</b>	
Drying surface	800 x 800 mm
Temperature	30 – 100 °C
Timer switch	0 - 60 min
Input power	2x 1 kW 230 V/~50 Hz
Weight approx.	19.5 kg

<b>Accessories</b>	<b>Article no.</b>
Replacement tube for ILT 2	6205007

# Infrared lacquer dryer

## Infrared lacquer dryer ILT 3W

- ▶ Sturdy stainless steel construction with hydraulic arm
- ▶ Dries the paint layer efficiently from the outside and inside, saving time and preventing bubbles
- ▶ Fully automatic, digital power setting via LED display with timer
- ▶ Electronic temperature setting from 35 °C - 100 °C
- ▶ Each of the three spotlights can be switched on individually
- ▶ 300° swivelling and rotatable lamp housing
- ▶ Two adjustable drying phases:
  - PULSE:** Interval operation for evaporation/ pre-drying
  - ROUTINE:** Continuous operation for hardening
- ▶ Ball bearing rollers with parking brake



<b>Model</b>	<b>ILT 3 W</b>
Art. no.	6205000

<b>Technical data</b>	
Drying surface	1200 x 1000 mm
Temperature	35 – 100 °C
Timer switch	0 - 99 min
Input power	3 x 1.1 kW 230 V/~50 Hz
Weight approx.	45 kg



<b>Accessories</b>	<b>Article no.</b>
Replacement tube for ILT 3W	6205005
① Adapter cable 230V Schuko - CEE coupling 16A, 1.5m	7013800
② Adapter cable 400V CEE- plug - CEE coupling 16A, 1.5m	7013805