


## PRO-L LIFTING CHAIN GRADE 80

Manufactured according to EN 818-2 standard.  
 Safety (design) factor for Grade 80 lifting chain is 4:1.  
 All PROlift's® chains are batch marked.

Lifting chains are used for lifting and for lashing. They can be fitted with accessories like master links, connecting and shortening links, hooks, shackles etc., thus can form a wide range of lifting devices, depending of requirements.

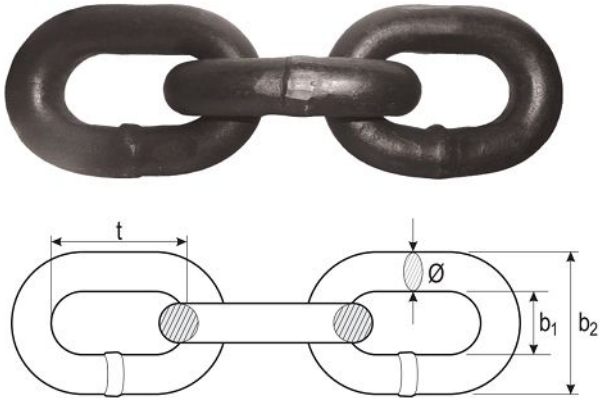

Model/ Features	Lifting WLL (t)	MBL (t)	Dimensions (mm)				Lashing and Mooring Lashing capacity - LC (kN)	Weight (kg/m)
			Ø	t	b1	b2		
PRO-L-04.12	0.5	2	4	12	5.2	14.8	9.8	0.35
PRO-L-05.15	0.8	3.2	5	15	6.5	18.5	15.7	0.50
PRO-L-06.18	1.12	4.48	6	18	7.8	22.2	22	0.80
PRO-L-07.21	1.5	6	7	21	9.1	25.6	30	1.10
PRO-L-08.24	2	8	8	24	10.4	29.6	40	1.40
PRO-L-10.30	3.15	12.6	10	30	13	37	63	2.20
PRO-L-13.39	5.3	21.2	13	39	16.9	48.1	100	3.80
PRO-L-16.48	8	32	16	48	20.8	59.2	160	5.60
PRO-L-18.54	10	40	18	54	23.4	66.6	200	7.40
PRO-L-19.57	11.2	44.8	19	57	24.7	70.3	219.7	8.10
PRO-L-20.60	12.5	50	20	60	26	74	250	8.60
PRO-L-22.66	15	60	22	66	28.6	81.4	300	10.2
PRO-L-26.78	21.2	84.8	26	78	33.8	96.2	415.8	14.9
PRO-L-32.96	31.5	126	32	96	41.6	118	617.8	22.3



PRO-KS	PRO-KO	PRO-KRA	PRO-KOA	PRO-KT	PRO-KSL	PRO-KAL
PRO-KS-06.06	PRO-KO-00.50	PRO-KRA-01.12	PRO-KOA-01.12	PRO-KT-06.06	PRO-KSL-06.06	PRO-KAL-06.06
PRO-KS-06.06	PRO-KO-01.00	PRO-KRA-01.12	PRO-KOA-01.12	PRO-KT-06.06	PRO-KSL-06.06	PRO-KAL-06.06
PRO-KS-06.06	PRO-KO-01.00	PRO-KRA-01.12	PRO-KOA-01.12	PRO-KT-06.06	PRO-KSL-06.06	PRO-KAL-06.06
PRO-KS-07.08	PRO-KO-01.50	PRO-KRA-02.00	PRO-KOA-02.00	PRO-KT-06.06	PRO-KSL-07.08	PRO-KAL-07.08
PRO-KS-07.08	PRO-KO-02.00	PRO-KRA-02.00	PRO-KOA-02.00	PRO-KT-10.10	PRO-KSL-07.08	PRO-KAL-07.08
PRO-KS-10.10	PRO-KO-03.00	PRO-KRA-03.15	PRO-KOA-03.15	PRO-KT-10.10	PRO-KSL-10.10	PRO-KAL-10.10
PRO-KS-13.13	PRO-KO-05.00	PRO-KRA-05.30	PRO-KOA-05.30	PRO-KT-13.13	PRO-KSL-13.13	PRO-KAL-13.13
PRO-KS-16.16	PRO-KO-07.00	PRO-KRA-08.00	PRO-KOA-08.00	PRO-KT-16.16	PRO-KSL-16.16	PRO-KAL-16.16
PRO-KS-18.20	PRO-KO-11.00	PRO-KRA-12.50	PRO-KOA-12.50	PRO-KT-20.20	PRO-KSL-18.20	PRO-KAL-20.20
PRO-KS-18.20	PRO-KO-11.00	PRO-KRA-12.50	PRO-KOA-12.50	PRO-KT-20.20	PRO-KSL-18.20	PRO-KAL-20.20
PRO-KS-18.20	PRO-KO-15.00	PRO-KRA-12.50	PRO-KOA-12.50	PRO-KT-20.20	PRO-KSL-18.20	PRO-KAL-20.20
PRO-KS-22.22	PRO-KO-15.00	PRO-KRA-15.00	PRO-KOA-15.00	PRO-KT-22.22	PRO-KSL-22.22	PRO-KAL-22.22
PRO-KS-26.26	PRO-KO-22.00	PRO-KRA-21.20	PRO-KOA-21.20	-	PRO-KSL-26.26	PRO-KAL-26.26
PRO-KS-32.32	PRO-KO-30.00	PRO-KRA-31.50	PRO-KOA-31.50	-	PRO-KSL-32.32	PRO-KAL-32.32